


QUANTUM 1-G (QA-50031)



Product description

Gobo projector



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Arm mounting installation

Light symbol




N

Product colour



Special finishes upon request

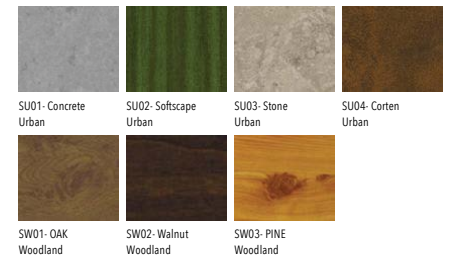

Technical information

Light source	1 COB
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	6.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	44 W
Lumen	2376 - 2508 lm
Efficacy	54 - 57 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1050 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	N [17°]
Bug	B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100

QUANTUM 1-G (QA-50031)

Product variants

HOW TO SPECIFY

LIGA	-	QA-50031	-	1050	-	N	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
QA-50031	1050 44W	N	8030	ND	01 BLACK							
			8040	DALI	02 DARK GREY							
					03 WHITE							
					05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

