

## Product description

Small



## Luminaire structure

- Die-cast aluminium frame and body
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Frosted glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

## Light symbol



G

## Product colour




01- Black (RAL 9011)    02- Dark Grey (RAL 7043)    03- White (RAL 9003)    05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

## Special finishes upon request



SU01- Concrete Urban    SU02- Softscape Urban    SU03- Stone Urban    SU04- Corten Urban



SW01- OAK Woodland    SW02- Walnut Woodland    SW03- PINE Woodland

## Technical information


Light source	12 LED
Light source type	LED
Dimming type	On/Off
Material	Aluminium
Weight	0.9 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	7 W
Lumen	310 - 323 lm
Efficacy	44 - 46 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G [91°x54°]
Bug	B0-U1-G0
ULR	1%
ULOR	1%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	23,000
Lifetime L80B10 (hrs)	45,000
Lifetime L80B50 (hrs)	49,000

**ABACUS 6 (AB-30031)****Product variants**

---

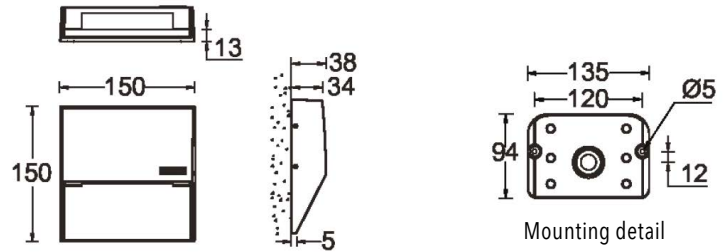**HOW TO SPECIFY****Accessories**

---



Surface mounting box for easy cabling (ABACUS 6)

LIGA-SCE-ABACUS-6