
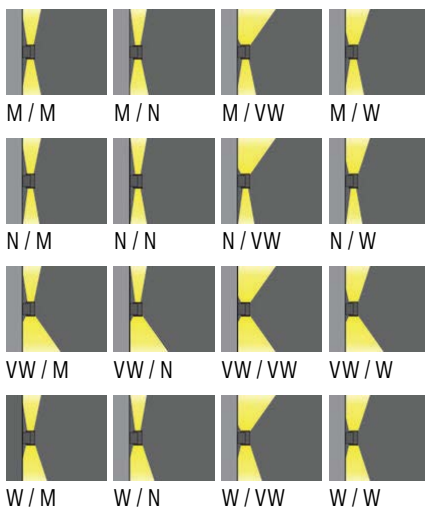
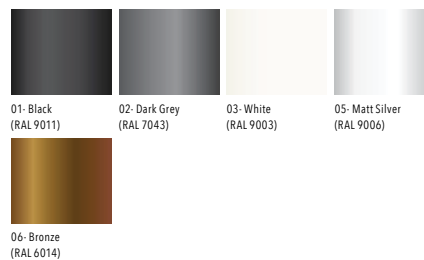
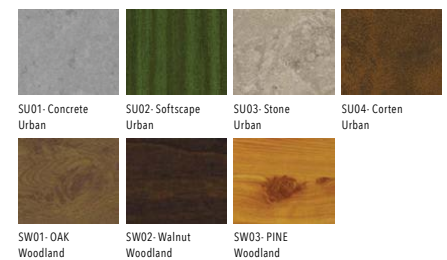


MARVIK 6 (MV-30051)

Product description

Ø150 - 240 mm - Down (Optic)
 & Up (Optic 2nd)


Luminaire structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Light symbol

Product colour

Special finishes upon request

Technical information

Light source	1 & 1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	4.6 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	53 W
Lumen	5890 - 6896 lm
Efficacy	109 - 128 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	M [28°, N [16°, VW [68°, W [44°]
Optic (Up)	M [28°, N [16°, VW [68°, W [44°]
Bug	B3-U5-G0, B2-U5-G0
ULR	50%, 52%, 47%, 49%, 48%, 51%
ULOR	50%, 52%, 47%, 49%, 49%, 48%, 51%
CIE flux code n°3	100, 99
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	50,700
Lifetime L80B10 (hrs)	63,500
Lifetime L80B50 (hrs)	63,500

MARVIK 6 (MV-30051)

Product variants

HOW TO SPECIFY

LIGA - MV-30051 - 700 - M - N - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION		CRI/CCT	DIMMING	COLOUR FINISH
DOWN-UP						
MV-30051	700 53W	M	M	8030	ND	01 BLACK
		N	N	8040	DALI	02 DARK GREY
		VW	VW			03 WHITE
		W	W			05 MATT SILVER
						06 BRONZE
					S - SPECIAL FINISH	

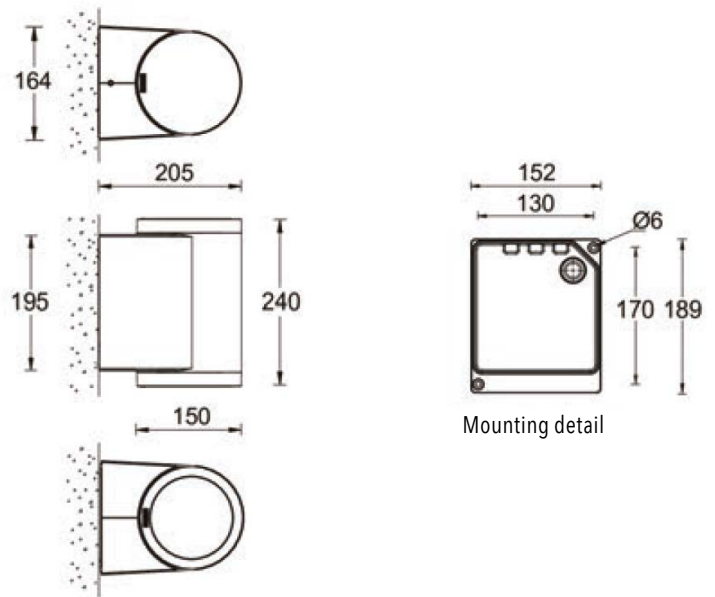

Accessories



Surface mounting box for easy cabling (MARVIK 6)
LIGA-SCE-MARVIK-6