

LIGHT LINEAR PT 12 (LI-30012)



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Light symbol



Product colour



Special finishes upon request

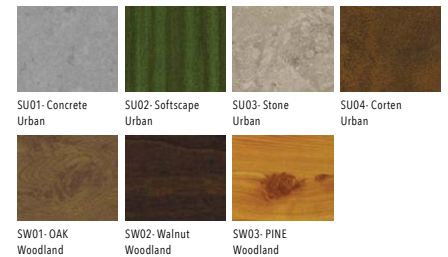

Technical information

Light source	2 x 12 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	7.7 kg
Operating temperature	-20°C to 50°C

Luminaire	
Power	54 W
Lumen	5501 - 6193 lm
Efficacy	102 - 115 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	T2 [139°x52°], T3 [129°x69°], T4 [102°x78°], LA01 [151°x65°]
Bug	B1-U0-G1
ULR	0%
ULOR	0%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

LIGHT LINEAR PT 12 (LI-30012)

Product variants

HOW TO SPECIFY

LIGA	-	LI-30012	-	700	-	T2	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
LI-30012	700 54W	T2	8030	ND	01 BLACK							
		T3	8040	DA	02 DARK GREY							
		T4			03 WHITE							
		LA01			05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

