


LIGHTALK 11 (LA-60021)



Product description


With recessing box - Without remote driver
Constant voltage (CV) 24 V - 455 mm - Class III



Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Two IP68 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable for LA-60021
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- Remote driver for constant voltage (CV) 24V is not included for LA-60021

Light symbol

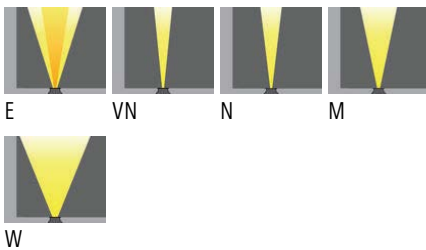

Product colour



Technical information

Light source	12 LED
Light source type	LED
Dimming type	On/Off
Material	Stainless Steel
Weight	2.4 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	16 W
Lumen	1401 - 1823 lm
Efficacy	88 - 114 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	24 VDC
Driver option	Remote driver for constant voltage (CV) not included
Driver	Constant voltage (CV) 24V
Input voltage	24 VDC



Optic	E [20°x 35°], VN [13°], N [15°] M [26°], W [43°]
Bug	B3-U1-G0, B2-U1-G0
ULR	0%
ULOR	0%
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LIGHTALK 11 (LA-60021)

Product variants

HOW TO SPECIFY

LIGA	-	LA-60021	-	16	-	VN	-	8030	-	ND	-	00
		MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH
		LA-60021		16W		E		8030		ND		00 STAINLESS STEEL
						VN		8040				
						N						
						M						
						W						

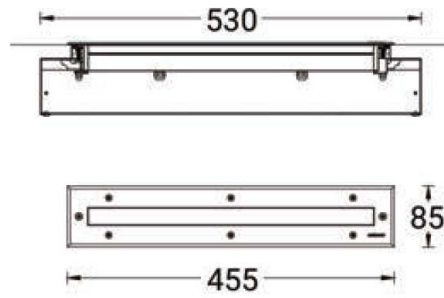

MOUNTING DETAIL