

SANDY 3 (SA-31491)



Product description

Small



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Light symbol



0

Product colour




01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

Special finishes upon request




SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban



SW01- OAK Woodland



SW02- Walnut Woodland



SW03- PINE Woodland

Technical information

Light source	80 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	2.3 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	19 W
Lumen	902 - 949 lm
Efficacy	47 - 50 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	600 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	0 [114°x107°]
Bug	B0-U1-G1
ULR	1.33%
ULOR	1.33%
CIE flux code n°3	93

SANDY 3 (SA-31491)


Product variants

HOW TO SPECIFY

LIGA	-	SA-31491	-	600	-	8030	-	ND	-	01
MODEL	OUTPUT	CRI/CCT	DIMMING	COLOUR FINISH						
SA-31491	600 19W	8030	ND	01 BLACK						
		8040	DALI	02 DARK GREY						
				03 WHITE						
				05 MATT SILVER						
				06 BRONZE						
				S - SPECIAL FINISH						

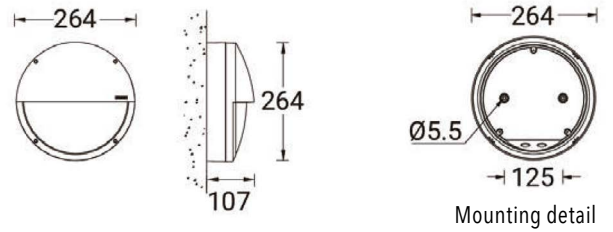

Accessories



Surface mounting box for easy cabling (SANDY 3)
LIGA-SCE-SANDY-3