

QUANTUM 1 (QA-50003)



Product description

Small



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for QA-50003
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Light symbol




VN

Product colour



Special finishes upon request

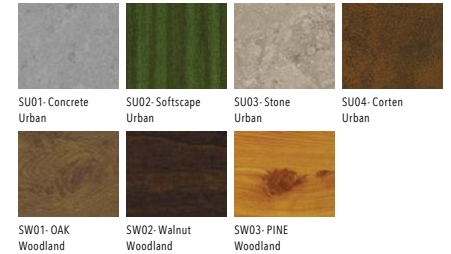

Technical information

Light source	7 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	4.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	30 W
Lumen	2597 - 2790 lm
Efficacy	87 - 93 lm/W
CCT / CRI	3000K, 4000K
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	VN [8°]
Bug	B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	109,000
Lifetime L80B10 (hrs)	109,000
Lifetime L80B50 (hrs)	109,000

QUANTUM 1 (QA-50003)

Product variants

HOW TO SPECIFY

LIGA	-	QA-50003	-	350	-	VN	-	8030	-	ND	-	01
		<b>MODEL</b>		<b>OUTPUT</b>		<b>DISTRIBUTION</b>		<b>CRI/CCT</b>		<b>DIMMING</b>		<b>COLOUR FINISH</b>
		QA-50003		350 30W		VN		8030		ND		01 BLACK
								8040		DALI		02 DARK GREY
												03 WHITE
												05 MATT SILVER
												06 BRONZE
												S - SPECIAL FINISH

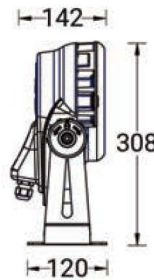

Accessories



Linear spread lens  
LIGA-A51614



Anti-glare visor  
LIGA-A53631



Anti-glare hood  
LIGA-A53731