

**LIGHTALK 2 (LA-60014)**



**Product description**


With recessing box - With driver  
 Constant current (CC) 500 mA - 1250 mm  
 Class I - RGBW



**Luminaire structure**

- Die-cast aluminium housing
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Four IP68 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-60014
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg

**Light symbol**

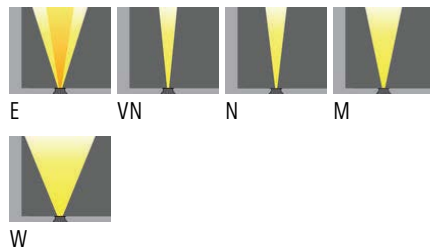

**Product colour**



**Technical information**

Light source	2 x 20 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Stainless Steel
Weight	7.4 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	66 W
Lumen	3302 - 3839 lm
Efficacy	50 - 58 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	E [16°x35°], VN [10°], N [13°] M [25°], W [43°]
Bug	B0-U5-G0
ULR	100%
ULOR	100%

LIGHTALK 2 (LA-60014)

Product variants

HOW TO SPECIFY

LIGA	-	LA-60014	-	500	-	M	-	RGBW30	-	DMX/RDM	-	00
		<b>MODEL</b>		<b>OUTPUT</b>		<b>DISTRIBUTION</b>		<b>CRI/CCT</b>		<b>DIMMING</b>		<b>COLOUR FINISH</b>
		LA-60014		500 66W		E		RGBW30		DMX		00 STAINLESS STEEL
						VN		RGBW40		DMX/RDM		
						N						
						M						
						W						

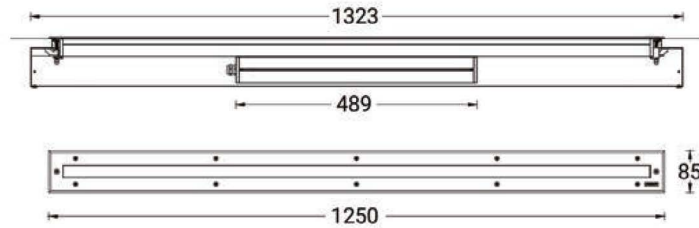

MOUNTING DETAIL