


LIGHT LINEAR PT 8 (LI-21241)



Product description

1 side - Supplied with specific square, straight aluminium pole - Height options: 3,4,5,6 m




Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV


Light symbol



Product colour

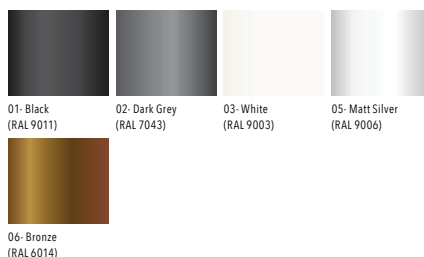

Special finishes upon request

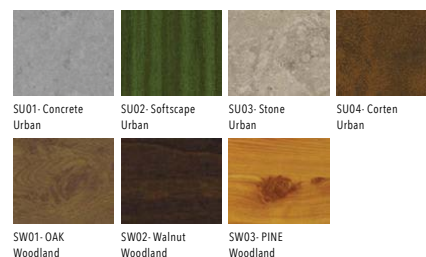

Technical information

Light source	24 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	23.8 kg
Operating temperature	-20°C to 50°C

Luminaire	
Power	54 W
Lumen	5501 - 6193 lm
Efficacy	102 - 115 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	T2 [143°x56°], T3 [142°x70°], T4 [100°x76°], LA01 [151°x65°]
Bug	B1-U0-G1, B2-U0-G2
ULR	0%
ULOR	0%
CIE flux code n°3	98, 97
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

LIGHT LINEAR PT 8 (LI-21241)

Product variants

HOW TO SPECIFY

LIGA - LI-21241 - 700 - T2 - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
LI-21241	700 54W	T2	8030	ND	01 BLACK	
		T3	8040	DALI	02 DARK GREY	
		T4			03 WHITE	
		LA01			05 MATT SILVER	
					06 BRONZE	
					S - SPECIAL FINISH	

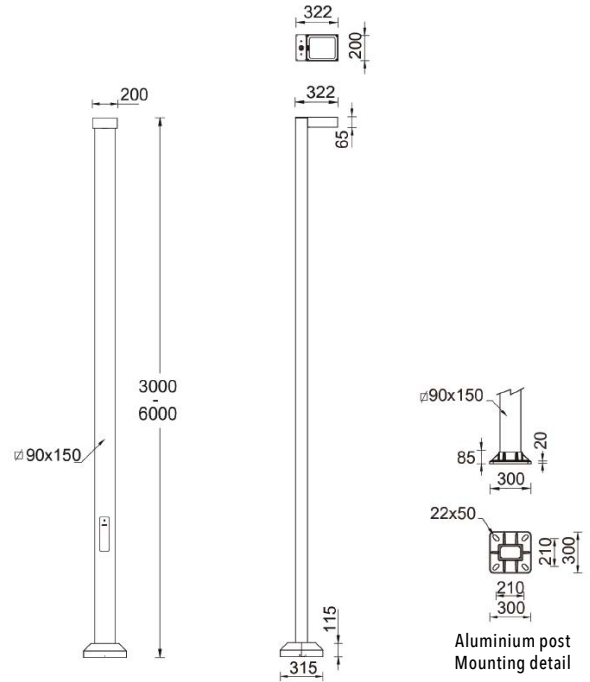

Accessories



3 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side
LIGA-APC130090-PT8-LI-21241



4 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side
LIGA-APC140090-PT8-LI-21241



5 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side
LIGA-APC150090-PT8-LI-21241



6 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side
LIGA-APC160090-PT8-LI-21241



Internal cable support for pole 3 m
LIGA-A23991



Internal cable support for pole 4 m
LIGA-A24091



Internal cable support for pole 5 m
LIGA-A24191



Internal cable support for pole 6 m
LIGA-A24291