


LIGHTALK 11 (LA-60023)



Product description


With recessing box - Without remote driver
Constant voltage (CV) 24 V - 1250 mm - Class III



Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Two IP68 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable for LA-60023
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- Remote driver for constant voltage (CV) 24V is not included for LA-60023

Light symbol

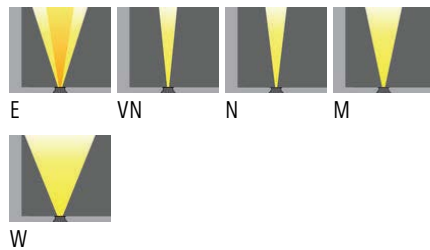

Product colour



Technical information

Light source	36 LED
Light source type	LED
Dimming type	On/Off
Material	Stainless Steel
Weight	7.1 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	55 W
Lumen	3871 - 4975 lm
Efficacy	76 - 98 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	24 VDC
Driver option	Remote driver for constant voltage (CV) not included
Driver	Constant voltage (CV) 24V
Input voltage	24 VDC



Optic	E [21°x36°], VN [13°], N [15°] M [25°], W [42°]
Bug	B3-U1-G0, B2-U1-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100

LIGHTALK 11 (LA-60023)

Product variants

HOW TO SPECIFY

LIGA	-	LA-60023	-	55	-	VN	-	8030	-	ND	-	00
		MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH
		LA-60023		55W		E		8030		ND		00 STAINLESS STEEL
						VN		8040				
						N						
						M						
						W						

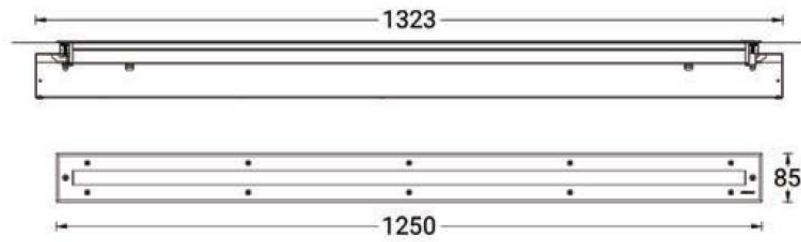

MOUNTING DETAIL