

ROBUST 2 (RO-80486-S)



Product description


With remote IP65 driver - Round - Stainless frame




Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector
- Remote driver (included)
- Recessed installation with remote IP65 driver

Light symbol

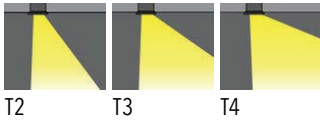

Product colour



Technical information

Light source	16 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Stainless Steel
Weight	4.2 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	36 W
Lumen	3476 - 3910 lm
Efficacy	97 - 109 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	T2 [140°x46°], T3 [140°x68°] T4 [91°x76°]
Bug	B1-U0-G1
ULR	0%
ULOR	0%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

ROBUST 2 (RO-80486-S)


Product variants

HOW TO SPECIFY

LIGA	-	RO-80486-S	-	700	-	T2	-	8030	-	ND	-	00
		MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH
		RO-80486-S		700 36W		T2		8030		ND		00 STAINLESS STEEL
						T3		8040		DALI		
						T4						

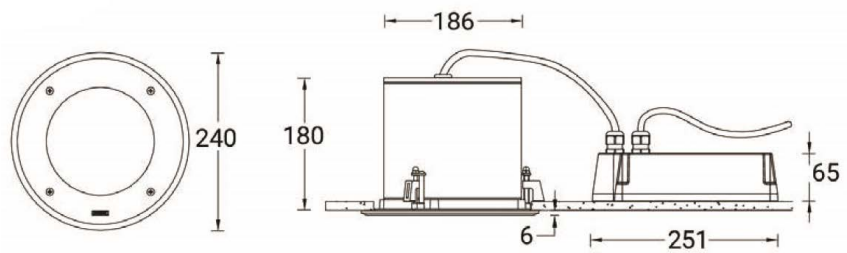

Accessories



Concrete box modification upon request
LIGA-CONCRETE-BOX