



Product description


With remote IP65 driver - Round - Stainless frame



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector
- Remote driver (included)
- Recessed installation with remote IP65 driver

Light symbol



AS

Product colour



00 - Stainless Steel

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Stainless Steel
Weight	4.2 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	29 W
Lumen	2535 - 2566 lm
Efficacy	87 - 88 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	AS [46°x56°]
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	55,000

ROBUST 2 (RO-80487-S)


Product variants

HOW TO SPECIFY

LIGA	-	RO-80487-S	-	700	-	AS	-	8030	-	ND	-	00
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
RO-80487-S	700 29W	AS	8030	ND	00 STAINLESS STEEL							
			8040	DALI								

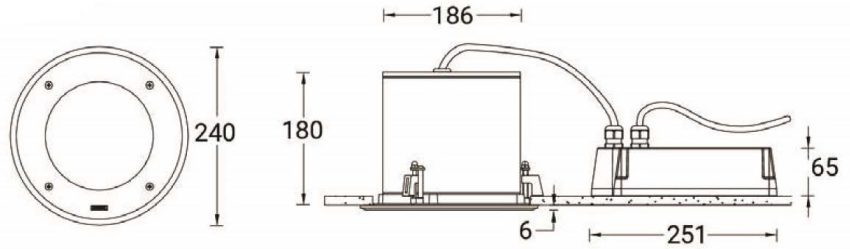

Accessories



Concrete box modification upon request
LIGA-CONCRETE-BOX