

ODESSA 1 (OD-50001)



Product description


Small



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for OD-50001
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Arm mounting installation


Light symbol

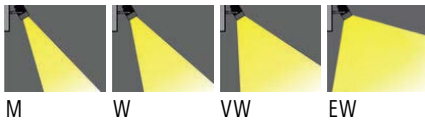

Product colour



Special finishes upon request

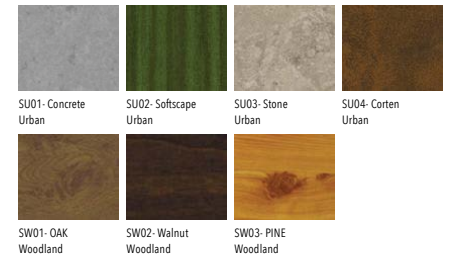

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	1.7 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	20 W
Lumen	1594 - 1703 lm
Efficacy	80 - 85 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	M [28°], W [35°], VW [46°] EW [75°]
Bug	B1-U0-G0, B2-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	61,000

ODESSA 1 (OD-50001)

Product variants

HOW TO SPECIFY

LIGA	-	OD-50001	-	500	-	M	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
OD-50001	500 20W	M	8030	ND	01 BLACK							
		W	8040	DALI	02 DARK GREY							
		VW			03 WHITE							
		EW			05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

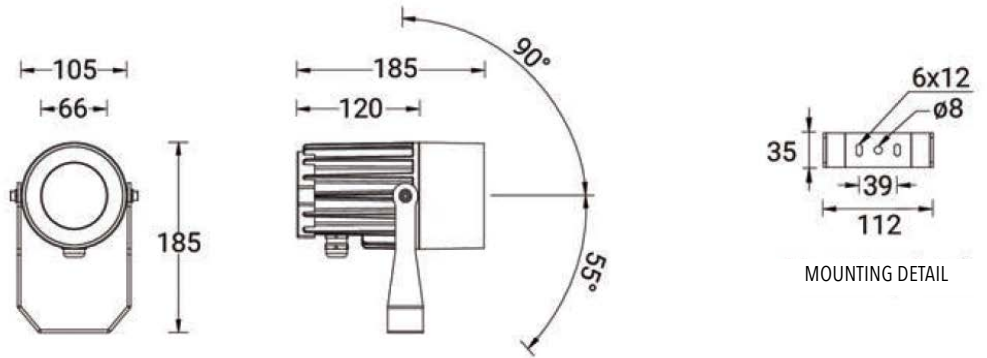

Accessories



Anti-glare visor
LIGA-A80331



Honeycomb louvre
LIGA-A80121



Linear spread lens
LIGA-A80214



Pole clamp for ODESSA 1, 2
LIGA-A22581