


**LIGHT LINEAR PT 7 (LI-21231)**



**Product description**


1 side - Supplied with specific square, straight aluminium pole - Height options: 3,4,5,6 m



**Luminaire structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV


**Light symbol**

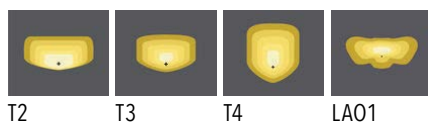

**Product colour**



**Special finishes upon request**

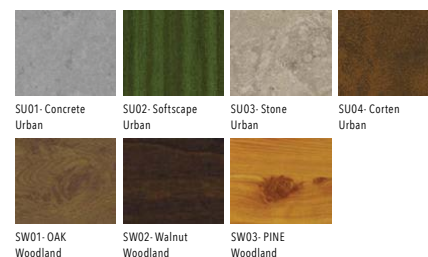

**Technical information**

Light source	12 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	23.5 kg
Operating temperature	-20°C to 50°C

<b>Luminaire</b>	
Power	28 W
Lumen	2950 - 3169 lm
Efficacy	105 - 113 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	T2 [143°x56°], T3 [142°x70°], T4 [100°x76°], LA01 [151°x65°]
Bug	B1-U0-G1
ULR	0%
ULOR	0%
CIE flux code n°3	98, 97
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	> 90,000
Lifetime L80B10 (hrs)	> 90,000
Lifetime L80B50 (hrs)	> 90,000

**LIGHT LINEAR PT 7 (LI-21231)**

**Product variants**

**HOW TO SPECIFY**

LIGA - LI-21231 - 700 - T2 - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
LI-21231	700 28W	T2	8030	ND	01 BLACK	
		T3	8040	DALI	02 DARK GREY	
		T4			03 WHITE	
		LA01			05 MATT SILVER	
					06 BRONZE	
					S - SPECIAL FINISH	

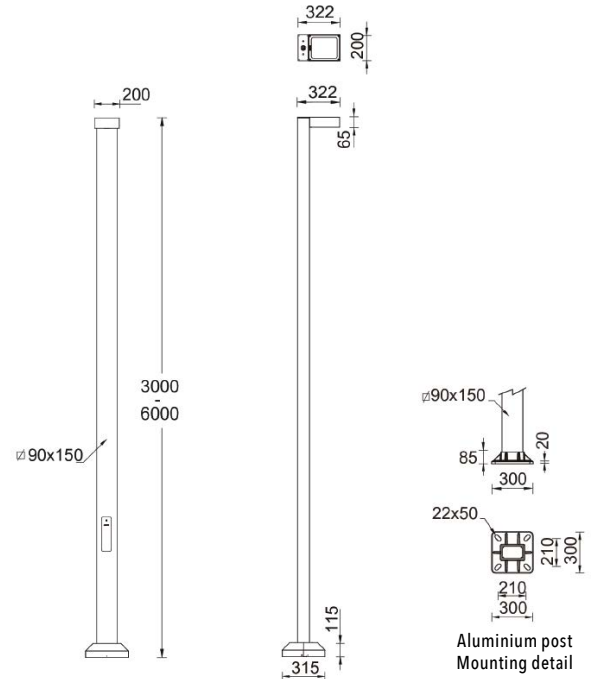

**Accessories**



3 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side  
LIGA-APC130090-PT7-LI-21231



4 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side  
LIGA-APC140090-PT7-LI-21231



5 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side  
LIGA-APC150090-PT7-LI-21231



6 m - Square, straight aluminium pole for LIGHT LINEAR PT - 1 side  
LIGA-APC160090-PT7-LI-21231



Internal cable support for pole 3 m  
LIGA-A23991



Internal cable support for pole 4 m  
LIGA-A24091



Internal cable support for pole 5 m  
LIGA-A24191



Internal cable support for pole 6 m  
LIGA-A24291