


LIGHT LINEAR PT 9 (LI-21251)



Product description

2 sides - Supplied with specific square, straight aluminium pole - Height options: 3,4,5,6 m




Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV


Light symbol



Product colour

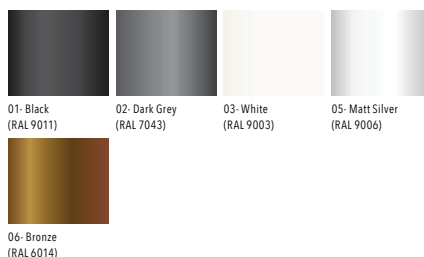

Special finishes upon request

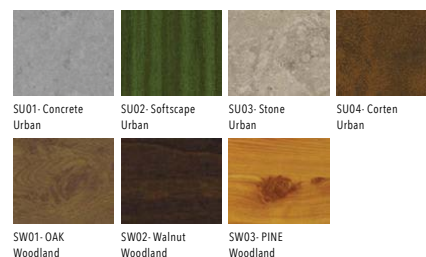

Technical information

Light source	2 x 12 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	26.5 kg
Operating temperature	-20°C to 50°C

Luminaire	
Power	56 W
Lumen	5900 - 6338 lm
Efficacy	105 - 113 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	T2 [143°x56°], T3 [142°x70°], T4 [100°x76°], LA01 [151°x65°]
Bug	B1-U0-G1
ULR	0%
ULOR	0%
CIE flux code n°3	98, 97
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	> 90,000
Lifetime L80B10 (hrs)	> 90,000
Lifetime L80B50 (hrs)	> 90,000

LIGHT LINEAR PT 9 (LI-21251)

Product variants

HOW TO SPECIFY

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
LI-21251	700 56W	T2	8030	ND	01 BLACK
		T3	8040	DALI	02 DARK GREY
		T4			03 WHITE
		LA01			05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

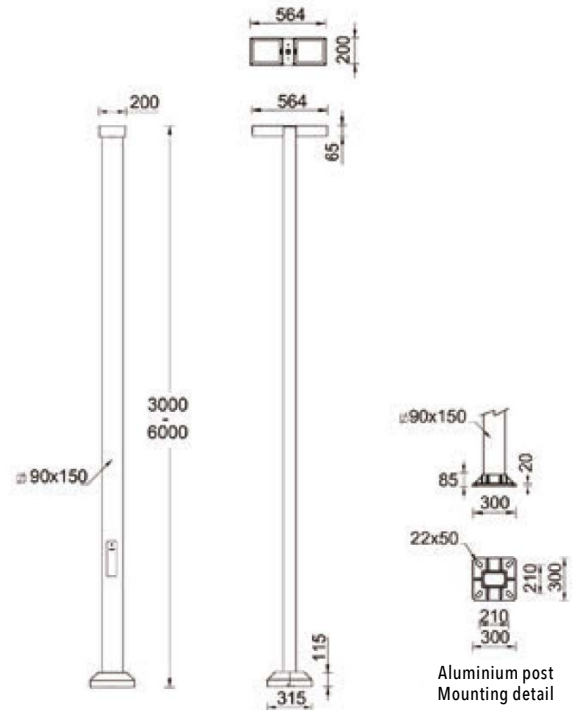

Accessories



3 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC230090-PT9-LI-21251



4 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC240090-PT9-LI-21251



5 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC250090-PT9-LI-21251



6 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC260090-PT9-LI-21251




Internal cable support for pole 3 m
LIGA-A23991



Internal cable support for pole 4 m
LIGA-A24091



Internal cable support for pole 5 m
LIGA-A24191



Internal cable support for pole 6 m
LIGA-A24291