

Product description


Down (Optic) & Up (Optic 2nd) - Rectangular



Luminaire structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Light symbol

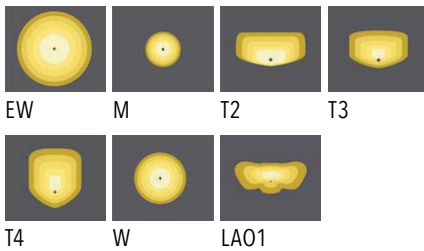

Product colour



Special finishes upon request

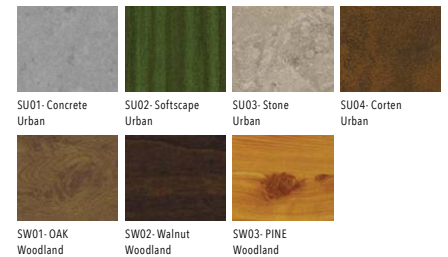

Technical information

Light source	2x4 & 2x4 LED
Light source type	LED
Dimming type	On/Off
Material	Aluminium
Weight	1.8 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	28 W
Lumen	2752 - 3350 lm
Efficacy	99 - 121 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1050 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	EW [99°x102°], M [30°], T2 [129°x49°], T3 [112°x80°], T4 [89°x60°], W [56°], LA01 [151°x65°]


Optic (Up)	EW [99°x102°], M [30°], T2 [129°x49°], T3 [112°x80°], T4 [89°x60°], W [56°], LA01 [151°x65°]
Bug	B1-U5-G0, B2-U5-G0, B0-U5-G0
ULR	51%, 48%, 49%, 50%, 47%, 52%, 53%
ULOR	51%, 48%, 49%, 50%, 47%, 52%, 53%
CIE flux code n°3	99, 97, 98, 100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

LEEDS 3 (LEE-30041)

Product variants

HOW TO SPECIFY

LIGA - LEE-30041 - 1050 - T2 - LA01 - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION		CRI/CCT	DIMMING	COLOUR FINISH
		DOWN	UP			
LEE-30041	1050 28W	EW	EW	8030	ND	01 BLACK
		M	M	8040		02 DARK GREY
		T2	T2			03 WHITE
		T3	T3			05 MATT SILVER
		T4	T4			06 BRONZE
		W	W			S - SPECIAL FINISH
		LA01	LA01			

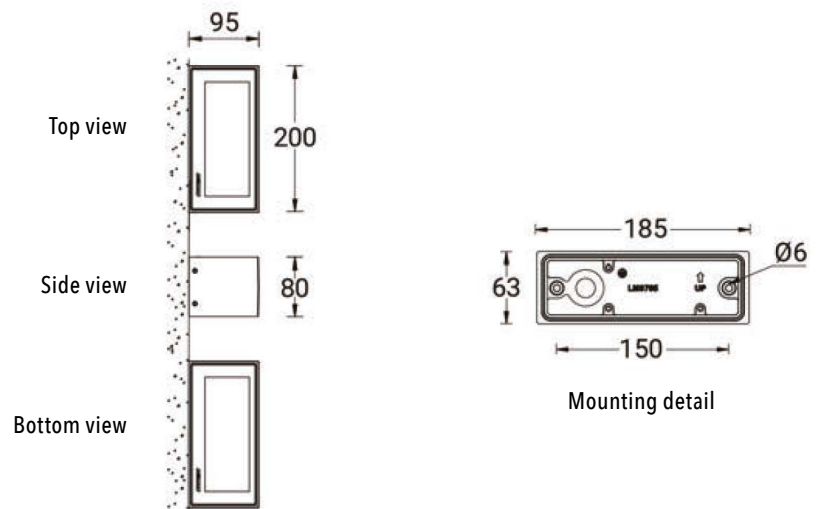

Accessories



Surface mounting box for easy cabling (LEEDS 3)
LIGA-SCE-LEEDS-3