


LIGHTALK 6 (LA-30001)



Product description


With driver - Constant current (CC) 500 mA
- 610 mm - Class I



Luminaire structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for LA-30001
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


Light symbol

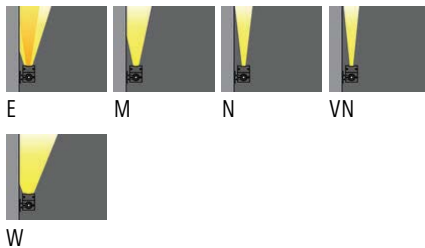

Product colour



Special finishes upon request

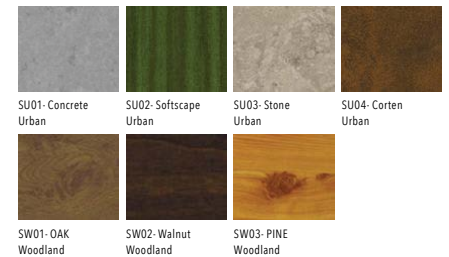

Technical information

Light source	18 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	3.6 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	28 W
Lumen	1943 - 2847 lm
Efficacy	59 - 86 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	E [18° x 35°], M [24°], N [14°], VN [12°], W [44°]
Bug	B0-U5-G0
ULR	100%
ULOR	100%
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LIGHTALK 6 (LA-30001)

Product variants

HOW TO SPECIFY

LIGA	-	LA-30001	-	500	-	T2	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
LA-30001	500 28W	E	8030	ND	01 BLACK							
		M	8040	DALI	02 DARK GREY							
		N			03 WHITE							
		VN			05 MATT SILVER							
		W			06 BRONZE							
					S - SPECIAL FINISH							

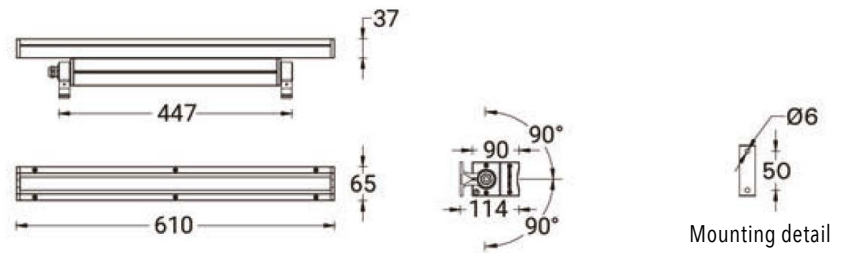

Accessories



150 mm extend arm mounting
LIGA-A30991



300 mm extend arm mounting
LIGA-A31091



450 mm extend arm mounting
LIGA-A31191



75 mm extend arm mounting
LIGA-A30891