



Product description


Large



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for OD-50131
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Arm mounting installation

Light symbol

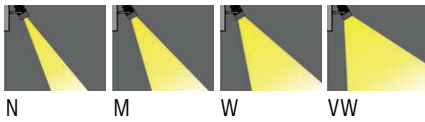

N M W VW


Product colour



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)

06- Bronze (RAL 6014)

Special finishes upon request

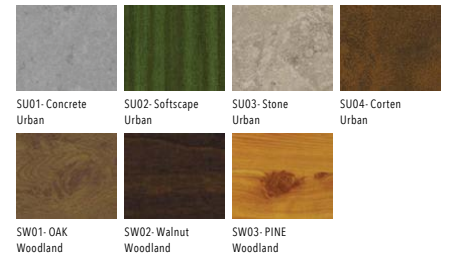

SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban

SW01- OAK Woodland SW02- Walnut Woodland SW03- PINE Woodland

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	5.5 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	70 W
Lumen	6909 - 8038 lm
Efficacy	99 - 115 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	900 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	N [21°], M [33°], W [48°], VW [70°]
-------	-------------------------------------

ODESSA 11 (OD-50131)

Product variants

HOW TO SPECIFY

LIGA	-	OD-50131	-	900	-	M	-	8030	-	ND	-	01
		MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH
		OD-50131		900 70W		N		8030		ND		01 BLACK
						M		8040		DALI		02 DARK GREY
						W						03 WHITE
						WW						05 MATT SILVER
												06 BRONZE
												S - SPECIAL FINISH

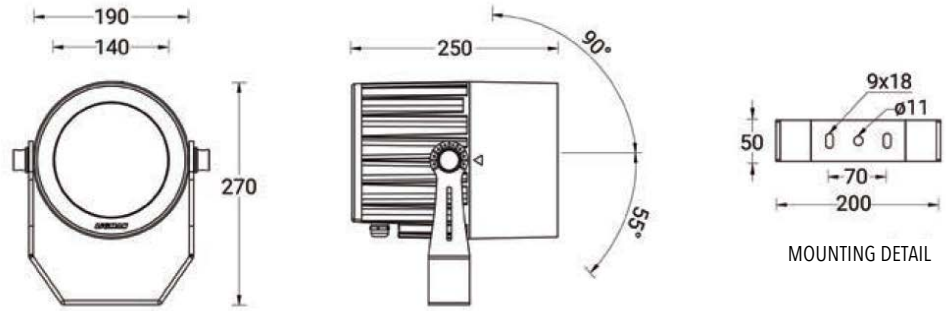

Accessories




Anti-glare visor
LIGA-A54331



Anti-glare louvre
LIGA-A54531



Linear spread lens
LIGA-A51814



Honeycomb louvre
LIGA-A54121