

LIGHTALK 1 (LA-60002)



Product description


With recessing box - With driver
Constant current (CC) 500 mA - 1250 mm - Class I




Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Single cable entry, through wiring upon request
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for LA-60002
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg

Light symbol

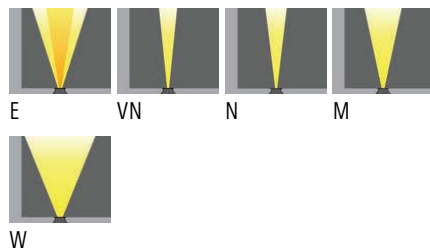

Product colour



00 - Stainless Steel

Technical information

Light source	36 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Stainless Steel
Weight	7.8 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	57 W
Lumen	3908 - 5703 lm
Efficacy	69 - 100 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	E [18°x 35°], VN [12°], N [14°] M [24°], W [42°]
Bug	B0-U5-G0
ULR	100%
ULOR	100%
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LIGHTALK 1 (LA-60002)

Product variants

HOW TO SPECIFY

LIGA	-	LA-60002	-	500	-	VN	-	8030	-	ND	-	00
		MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH
		LA-60002		500 57W		E		8030		ND		00 STAINLESS STEEL
						VN		8040		DALI		
						N						
						M						
						W						

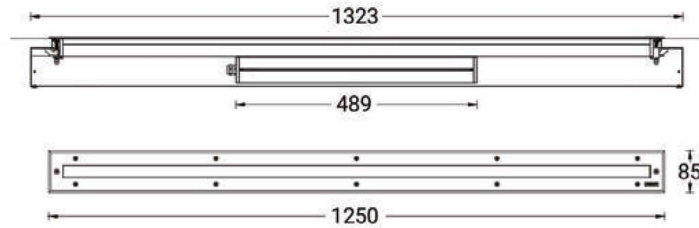

MOUNTING DETAIL

Accessories



Connector IP68
LIGA-A62591