



## Product description


Ø160 - 262 mm - Down - Round - RGBW



## Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Supplied with 200mm power cable, 200mm DMX Input and 200mm DMX Output cables - IP67 Connectors not included
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


## Light symbol

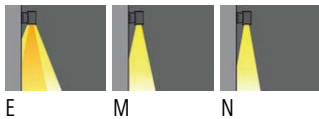

## Product colour



## Special finishes upon request

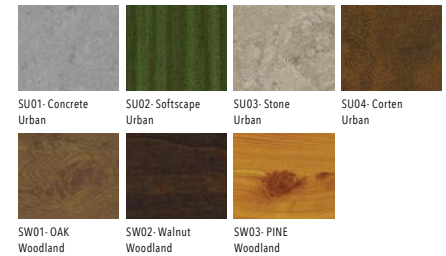

## Technical information

Light source	7 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	4.3 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	33 W
Lumen	1119 - 1429 lm
Efficacy	34 - 43 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	E [26° x 48°], M [35°], N [21°]
Bug	B1-U1-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100

JET 51 (JE-30393)


Product variants

HOW TO SPECIFY

LIGA - JE-30393 - 350 - N - RGBW30 - DMX - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
JE-30393	350 33W	E	RGBW30	DMX	01 BLACK	
		M	RGBW40	DMX/RDM	02 DARK GREY	
		N			03 WHITE	
					05 MATT SILVER	
					06 BRONZE	
					S- SPECIAL FINISH	

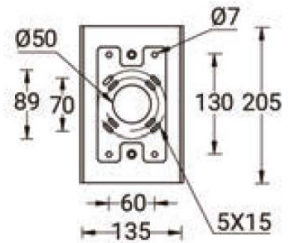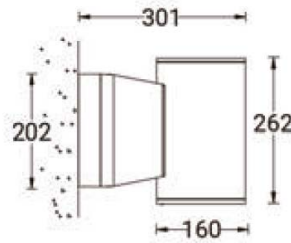

Mounting detail

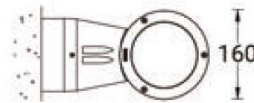

Accessories



Surface mounting box for easy cabling (JET 51)  
LIGA-SCE-JET-51