

QUANTUM 2 (QA-50011)



Product description


Medium



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for QA-50011
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear


Light symbol



Product colour



Special finishes upon request

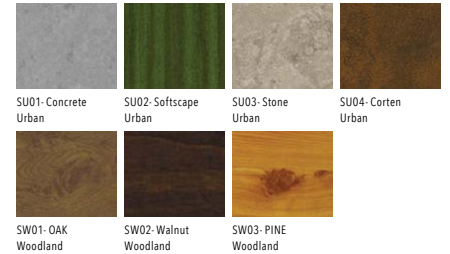

Technical information

Light source	6 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	8.5 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	83 W
Lumen	7496 - 8132 lm
Efficacy	90 - 98 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	N [21°], M [28°], W [34°] VW [75°]
Bug	B4-U0-G0, B3-U0-G1, B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100, 99

QUANTUM 2 (QA-50011)

Product variants

HOW TO SPECIFY

LIGA	QA-50011	700	M	8030	ND	01
	MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
	QA-50011	700 83W	N	8030	ND	01 BLACK
			M	8040	DALI	02 DARK GREY
			W			03 WHITE
			WW			05 MATT SILVER
						06 BRONZE
						S - SPECIAL FINISH



Accessories



Anti-glare louvre
LIGA-A51521



Linear spread lens
LIGA-A51714



Anti-glare visor
LIGA-A53831



Anti-glare hood
LIGA-A53931