

**JET 53** (JE-30383)



**Product description**


Ø160 - 262 mm - Down (Optic)  
& Up (Optic 2nd) - Round - RGBW




**Luminaire structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Supplied with 200mm power cable, 200mm DMX Input and 200mm DMX Output cables - IP67 Connectors not included
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


**Light symbol**



**Product colour**

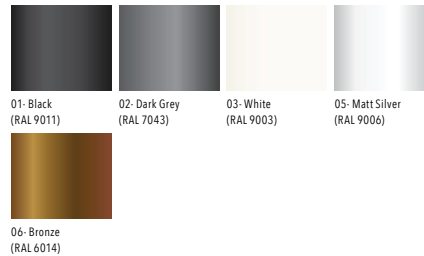

**Special finishes upon request**

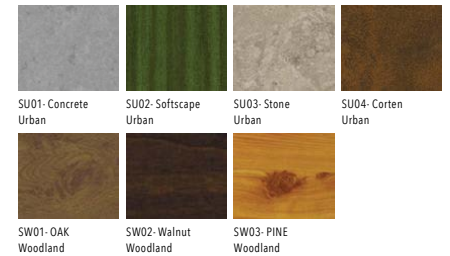

**Technical information**

Light source	7 & 7 LED
Light source type	LED
Dimming type	DMX,DMX/RDM
Material	Aluminium
Weight	5.3 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	66 W
Lumen	2238 - 2858 lm
Efficacy	34 - 43 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	E [26° x 48°], M [35°], N [21°]
Optic (Up)	E [26° x 48°], M [35°], N [21°]

JET 53 (JE-30383)


Product variants

HOW TO SPECIFY

LIGA	JE-30383	- 350	- M	- N	- RGBW30	- DMX	- 01
MODEL	OUTPUT	DISTRIBUTION		CRI/CCT	DIMMING	COLOUR FINISH	
<b>DOWN-UP</b>							
JE-30383	350 66W	E	E	RGBW30	DMX	01 BLACK	
		M	M	RGBW40	DMX/RDM	02 DARK GREY	
		N	N			03 WHITE	
						05 MATT SILVER	
						06 BRONZE	
						S- SPECIAL FINISH	



Mounting detail



Accessories



Surface mounting box for easy cabling (JET 53)  
LIGA-SCE-JET-53