

VANCOUVER 2 (VA-20011)



**Product description**

160x160 mm - 3000 mm  
No decorative pattern - IP65



**Luminaire structure**


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

**Light symbol**




G

**Product colour**

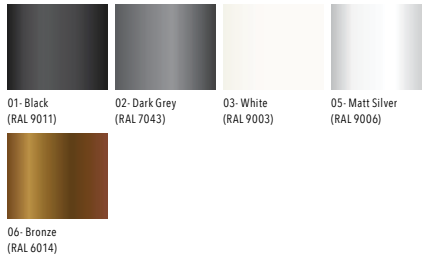

**Special finishes upon request**

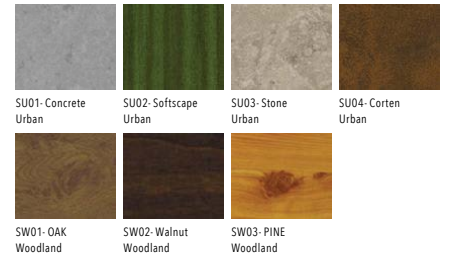

**Technical information**

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	25.0 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	20 W
Lumen	1397 - 1414 lm
Efficacy	70 - 71 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [65°]
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	61,000

VANCOUVER 2 (VA-20011)

Product variants

HOW TO SPECIFY

LIGA	-	VA-20011	-	500	-	G	-	8030	-	ND	-	01
		MODEL	OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH	
		VA-20011	500 20W		G		8030		ND		01 BLACK	
							8040		DALI		02 DARK GREY	
											03 WHITE	
											05 MATT SILVER	
											06 BRONZE	
											S - SPECIAL FINISH	

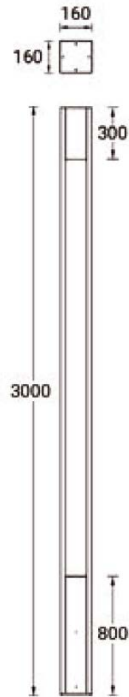

Accessories



Circuit breaker box IP44  
LIGA-A21291



Root mount kit  
LIGA-A20991