



Product description

Small



Luminaire structure

- Die-cast aluminium frame and body
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Frosted glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Light symbol



G

Product colour




01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

Special finishes upon request




SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban



SW01- OAK Woodland



SW02- Walnut Woodland



SW03- PINE Woodland

Technical information

Light source	12 LED
Light source type	LED
Dimming type	On/Off
Material	Aluminium
Weight	0.9 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	7 W
Lumen	315 - 329 lm
Efficacy	45 - 47 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [92° x 55°]
Bug	B0-U1-G0
ULR	1%
ULOR	1%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	23,000
Lifetime L80B10 (hrs)	45,000
Lifetime L80B50 (hrs)	49,000

ABACUS 7 (AB-30041)

Product variants

HOW TO SPECIFY

LIGA	-	AB-30041	-	350	-	G	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
AB-30041	350 7W	G	8030	ND	01 BLACK							
			8040		02 DARK GREY							
					03 WHITE							
					05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

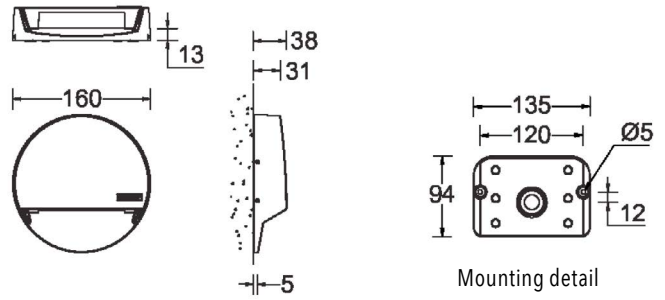

Accessories



Surface mounting box for easy cabling (ABACUS 7)
LIGA-SCE-ABACUS-7