

LIGHT LINEAR PT 1 (LI-10021)



Product description


200x80 mm - 1000 mm - 1 side



Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Light symbol

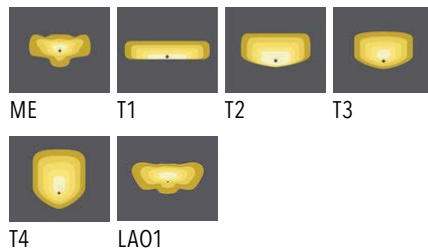

Product colour



Special finishes upon request

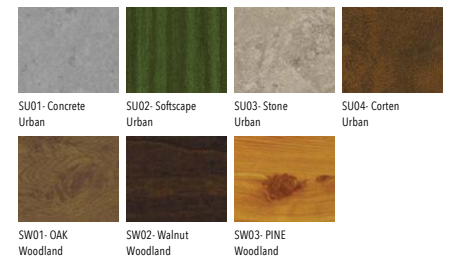

Technical information

Light source	12 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	11.2 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	14 & 28 W
Lumen	1774 - 3169 lm
Efficacy	105 - 113 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 & 700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	ME [138°x56°], T1 [149°x72°] T2 [137°x51°], T3 [126°x89°] T4 [103°x74°], LA01 [151°x65°]
Bug	B1-U0-G1
ULR	0%
ULOR	0%
CIE flux code n°3	98, 97
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

LIGHT LINEAR PT 1 (LI-10021)

Product variants

HOW TO SPECIFY

LIGA	-	LI-10021	-	350	-	T2	-	8030	-	ND	-	01
MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH		
LI-10021		350 14W		ME		8030		ND		01 BLACK		
		700 28W		T1		8040		DALI		02 DARK GREY		
				T2						03 WHITE		
				T3						05 MATT SILVER		
				T4						06 BRONZE		
				LA01						S - SPECIAL FINISH		

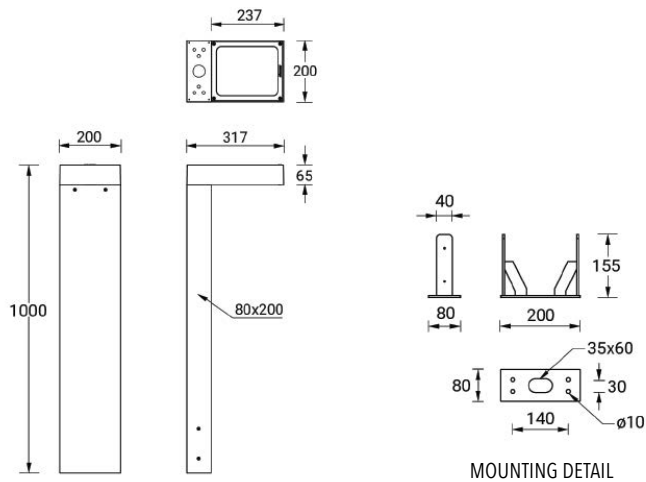

Accessories



Anchor bolt
LIGA - A11191