

LADOR 4 (LD-50031)



Product description


Integral control gear - 145x145 mm - Class I



Luminaire structure

- Die-cast aluminium housing
- Thermal heat dissipation body
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for LD-50031
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


Light symbol

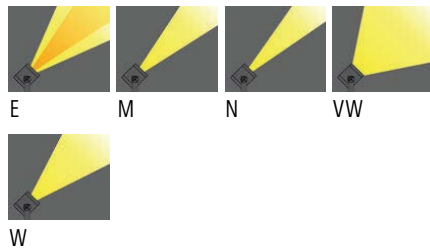

Product colour



Special finishes upon request

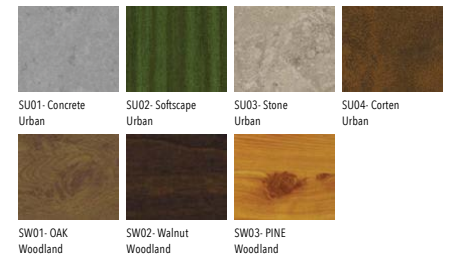

Technical information

Light source	16 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	3.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	35 W
Lumen	2219 - 4110 lm
Efficacy	63 - 117 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80 TW (AMBER - 3000K)
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	E [43°x11°], M [16°] N [10°], VW [72°], W [33°]
Bug	B3-U0-G0, B2-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LADOR 4 (LD-50031)

Product variants

HOW TO SPECIFY


LIGA - LD-50031 - 700 - E - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
LD-50031	700 35W	E	8030	ND	01 BLACK	
		M	8040	DALI	02 DARK GREY	
		N	TW		03 WHITE	
		VW			05 MATT SILVER	
		W			06 BRONZE	
					S - SPECIAL FINISH	

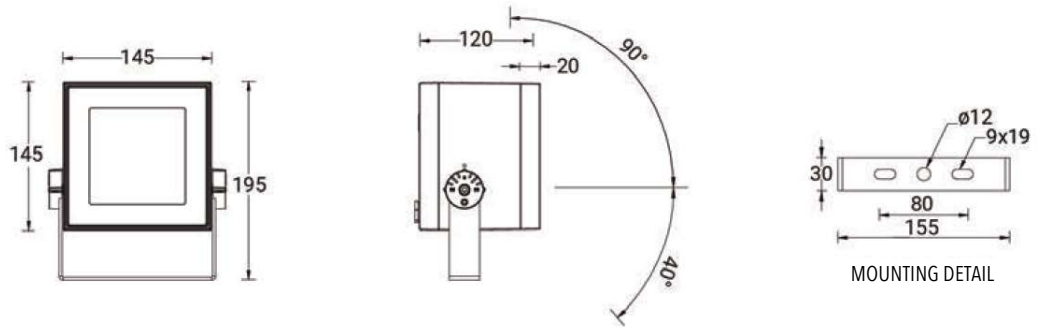

Accessories




Anti-glare visor
LIGA-A53131




Honeycomb louvre
LIGA-A52121




Linear spread lens
LIGA-A51414




Colour filter (Red)
LIGA-A51416



Colour filter (Blue)
LIGA-A51417



Colour filter (Yellow)
LIGA-A51418



Colour filter (Green)
LIGA-A51419