


LADOR 2 (LD-50012)



Product description


Constant voltage (CV) 24 V - 82x82 mm
Class III - RGBW



Luminaire structure

- Die-cast aluminium housing
- Thermal heat dissipation body
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 8x0.5 sqmm outdoor cable for LD-50012
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included for LD-50012


Light symbol

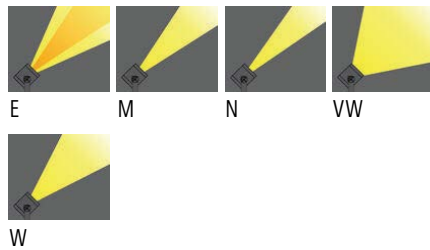

Product colour



Special finishes upon request

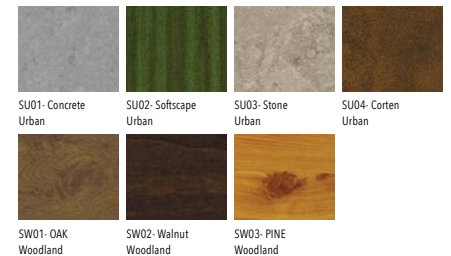

Technical information

Light source	4 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	1 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	10W
Lumen	406 - 520 lm
Efficacy	41 - 52 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	24 VDC
Driver option	Remote driver (included)
Driver	Constant voltage (CV) 24V
Input voltage	24 VDC




Optic	E [43°x11°], M [17°] N [8°], VW [65°], W [26°]
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse 5	7 SDCM
Lifetime L90B10 (hrs)	50,000
Lifetime L80B10 (hrs)	68,000
Lifetime L80B50 (hrs)	100,000

LADOR 2 (LD-50012)

Product variants

HOW TO SPECIFY

MODEL	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
LD-50012	E	RGBW30	DMX	01 BLACK
	M	RGBW40	DMX/RDM	02 DARK GREY
	N			03 WHITE
	VW			05 MATT SILVER
	W			06 BRONZE
				S - SPECIAL FINISH

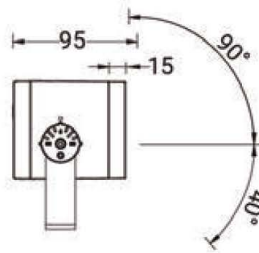


Accessories



Anti-glare visor
LIGA-A52931



Ground spike
LIGA-A50941

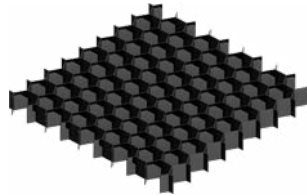

Honeycomb louvre
LIGA-A51921



Linear spread lens
LIGA-A51214