



JET 54 (JE-30403)



Product description


160x160 mm - 263 mm - Down (Optic)
& Up (Optic 2nd) - Square - RGBW

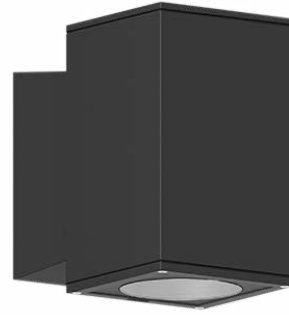

Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Supplied with 200mm power cable, 200mm DMX Input and 200mm DMX Output cables - IP67 Connectors not included
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Light symbol

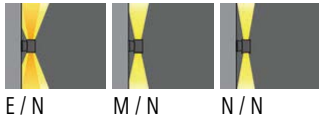

Product colour



Special finishes upon request

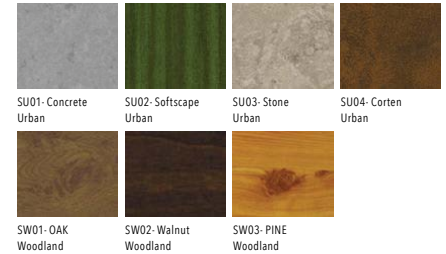

Technical information

Light source	7 & 7 LED
Light source type	LED
Dimming type	DMX,DMX/RDM
Material	Aluminium
Weight	6.7 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	66 W
Lumen	2238 - 2858 lm
Efficacy	34 - 43 lm/W
CCT / CRI	RGBW30, RGBW40, RGBW65
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	E [26° x 48°], M [35°], N [21°]
Optic (Up)	E [26° x 48°], M [35°], N [21°]

JET 54 (JE-30403)

Product variants

HOW TO SPECIFY

LIGA	-	JE-30403	-	350	-	M	-	N	-	RGBW30	-	DMX	-	01
MODEL	OUTPUT	DISTRIBUTION		CRI/CCT	DIMMING	COLOUR FINISH								
DOWN-UP														
JE-30403	350 66W	E	E	RGBW30	DMX	01 BLACK								
		M	M	RGBW40	DMX/RDM	02 DARK GREY								
		N	N	RGBW65		03 WHITE								
						05 MATT SILVER								
						06 BRONZE								
						S- SPECIAL FINISH								

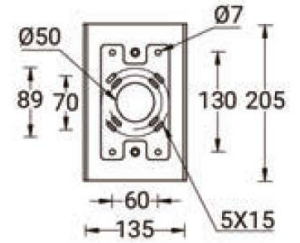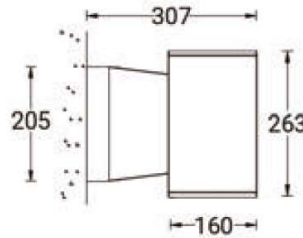

Mounting detail

Accessories



Surface mounting box for easy cabling (JET 54)
LIGA-SCE-JET-54