


JET 38 (JE-30401)



Product description


160x160 mm - 263 mm - Down (Optic)
& Up (Optic 2nd) - Square




Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Light symbol

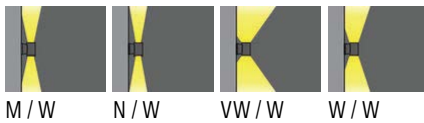

Product colour

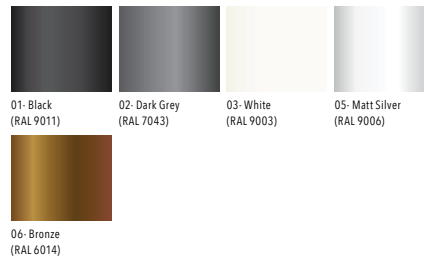

Special finishes upon request

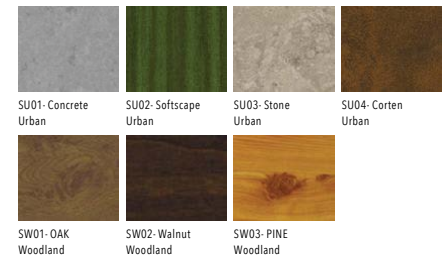

Technical information

Light source	1 & 1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	6.2 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	70 W
Lumen	6950 - 8188 lm
Efficacy	99 - 117 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	900 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	M [26°], N [16°], VW [59°], W [42°]
Optic (Up)	M [26°], N [16°], VW [59°], W [42°]
Bug	B3-U5-G0
ULR	50%, 51%, 47%, 49%, 48%, 52%
ULOR	50%, 51%, 47%, 49%, 48%, 52%
CIE flux code n°3	99, 100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	50,700
Lifetime L80B10 (hrs)	63,500
Lifetime L80B50 (hrs)	63,500

JET 38 (JE-30401)


Product variants

HOW TO SPECIFY

LIGA - JE-30401 - 900 - M - N - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION		CRI/CCT	DIMMING	COLOUR FINISH
DOWN-UP						
JE-30401	900 70W	M	M	8030	ND	01 BLACK
		N	N	8040	DALI	02 DARK GREY
		VW	VW			03 WHITE
		W	W			05 MATT SILVER
						06 BRONZE
					S - SPECIAL FINISH	



Mounting detail



Accessories



Surface mounting box for easy cabling (JET 38)
LIGA-SCE-JET-38