


LADOR 1 (LD-50002)



Product description

Constant voltage (CV) 24 V - 62x62 mm
Class III - RGBW



Luminaire structure

- Die-cast aluminium housing
- Thermal heat dissipation body
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 8x0.5 sqmm outdoor cable for LD-50002
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included for LD-50002

Light symbol




M

Product colour



Special finishes upon request

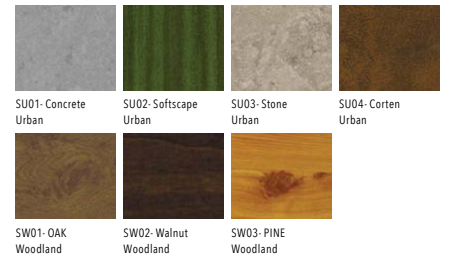

Technical information

Light source	1 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	0.7 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	4 W
Lumen	166 - 170 lm
Efficacy	42 - 42 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	24 VDC
Driver option	Remote driver (included)
Driver	Constant voltage (CV) 24V
Input voltage	24 VDC




Optic	M [34°]
-------	---------

LADOR 1 (LD-50002)

Product variants

HOW TO SPECIFY

LIGA	-	LD-50002	-	M	-	RGBW30	-	DMX	-	01
MODEL	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH						
LD-50002	M	RGBW30	DMX	01 BLACK						
		RGBW30	DMX/RDM	02 DARK GREY						
				03 WHITE						
				05 MATT SILVER						
				06 BRONZE						
				S - SPECIAL FINISH						




Accessories



Anti-glare visor
LIGA-A52831



Ground spike
LIGA-A50641



Honeycomb louvre
LIGA-A51821



Linear spread lens
LIGA-A51114