

LADOR 3 (LD-50022)



Product description


Integral control gear - 120x120 mm
Class I - RGBW



Luminaire structure

- Die-cast aluminium housing
- Thermal heat dissipation body
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 8x0.5 sqmm outdoor cable for LD-50022
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


Light symbol

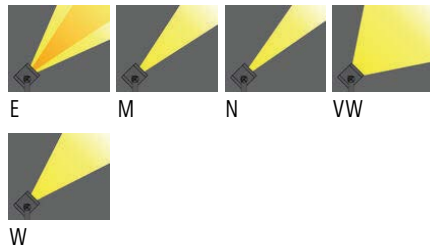

Product colour



Special finishes upon request

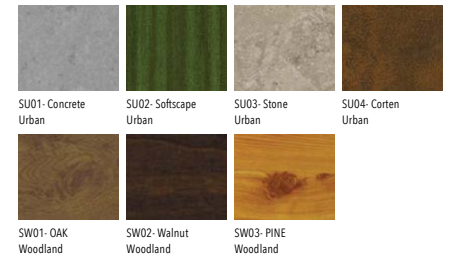

Technical information

Light source	9 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	2 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	22 W
Lumen	853 - 1133 lm
Efficacy	39 - 52 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant voltage (CV)
Input voltage	220-240 V 50/60 Hz


Optic	E [43°x11°], M [17°], N [8°] VW [65°], W [26°]
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100

LADOR 3 (LD-50022)

Product variants

HOW TO SPECIFY


LIGA	-	LD-50022	-	M	-	RGBW30	-	DMX	-	01
MODEL	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH						
LD-50022	E	RGBW30	DMX	01 BLACK						
	M	RGBW40	DMX/RDM	02 DARK GREY						
	N			03 WHITE						
	VW			05 MATT SILVER						
	W			06 BRONZE						
				S - SPECIAL FINISH						

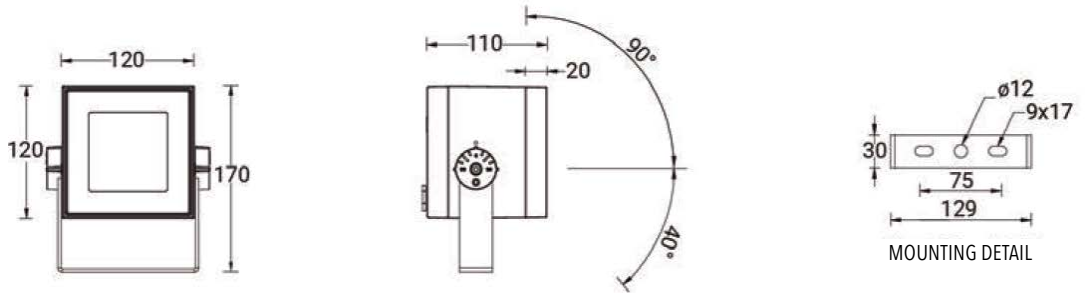

Accessories



Anti-glare visor
LIGA-A53031

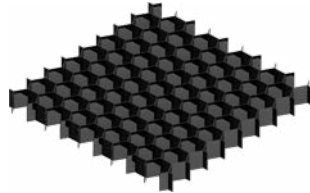

Honeycomb louvre
LIGA-A52021



Linear spread lens
LIGA-A51314