

VANCOUVER 20 (VA-20151)



**Product description**


240x240 mm - 3700 mm  
No decorative pattern - IP66 - RGBW



**Luminaire structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Supplied with 300mm power cable 300mm DMX Input and 300mm DMX Output cables. IP Connectors not included
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

**Light symbol**



E N M

**Product colour**



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)


**Special finishes upon request**




SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban



SW01- OAK Woodland



SW02- Walnut Woodland



SW03- PINE Woodland

**Technical information**

Light source	7 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	52 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	33 W
Lumen	1119 - 1429 lm
Efficacy	34 - 43 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	E [48°x26°], N [21°], M [35°]
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	7 SDCM
Lifetime L90B10 (hrs)	15,000
Lifetime L80B10 (hrs)	31,000
Lifetime L80B50 (hrs)	34,000

VANCOUVER 20 (VA-20151)

Product variants

HOW TO SPECIFY

LIGA - VA-20151 - 500 - E - RGBW30 - DMX/RDM - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
VA-20151	500.33W	E	RGBW30	DMX	01 BLACK	
		N	RGBW40	DMX/RDM	02 DARK GREY	
					03 WHITE	
					05 MATT SILVER	
		M			06 BRONZE	
				S - SPECIAL FINISH		

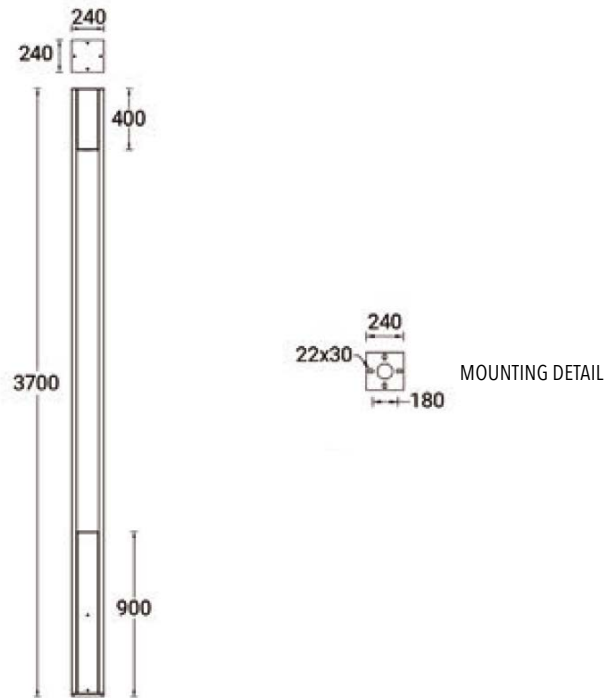

Accessories



Circuit breaker box IP44  
LIGA-A21291



Root mount kit  
LIGA-A21391