

**JET 37** (JE-30381)



**Product description**


Ø160 - 262 mm - Down (Optic)  
& Up (Optic 2nd) - Round



**Luminaire structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


**Light symbol**

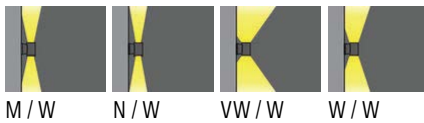

**Product colour**



**Special finishes upon request**

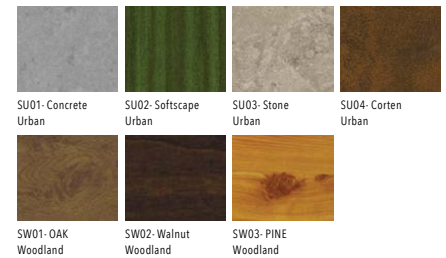

**Technical information**

Light source	1 & 1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	5.0 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	70 W
Lumen	6950 - 8188 lm
Efficacy	99 - 117 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	900 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	M [26°], N [16°], VW [59°], W [42°]
Optic (Up)	M [26°], N [16°], VW [59°], W [42°]
Bug	B3-U5-G0
ULR	50%, 51%, 47%, 49%, 48%, 52%
ULOR	50%, 51%, 47%, 49%, 48%, 52%
CIE flux code n°3	99, 100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	50,700
Lifetime L80B10 (hrs)	63,500
Lifetime L80B50 (hrs)	63,500

JET 37 (JE-30381)

Product variants

HOW TO SPECIFY

LIGA	-	JE-30381	-	900	-	M	-	N	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION		CRI/CCT	DIMMING	COLOUR FINISH								
<b>DOWN-UP</b>														
JE-30381	900 70W	M	M	8030	ND	01 BLACK								
		N	N	8040	DALI	02 DARK GREY								
		VW	VW			03 WHITE								
		W	W			05 MATT SILVER								
						06 BRONZE								
						S- SPECIAL FINISH								

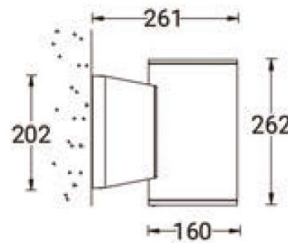

Accessories



Surface mounting box for easy cabling (JET 37)  
LIGA-SCE-JET-37