



## Product description

240x240 mm - 3700 mm

Decorative pattern type 3 - IP66 - RGBW



## Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Supplied with 300mm power cable 300mm DMX Input and 300mm DMX Output cables. IP Connectors not included
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

## Light symbol



E N M

## Product colour



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

## Special finishes upon request



SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban



SW01- OAK Woodland SW02- Walnut Woodland SW03- PINE Woodland

## Technical information

Light source	7 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	54.3 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	33 W
Lumen	1119 - 1429 lm
Efficacy	34 - 43 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	E [48°x 26°], N [21°], M [35°]
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	7 SDCM
Lifetime L90B10 (hrs)	15,000
Lifetime L80B10 (hrs)	31,000
Lifetime L80B50 (hrs)	34,000


VANCOUVER 23 (VA-20181)

Product variants

HOW TO SPECIFY

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
VA-20181	500.33W	E	RGBW30	DMX	01 BLACK
		N	RGBW40	DMX/RDM	02 DARK GREY
		M			03 WHITE
					05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

LIGA - VA-20181 - 500 - E - RGBW30 - DMX/RDM - 01

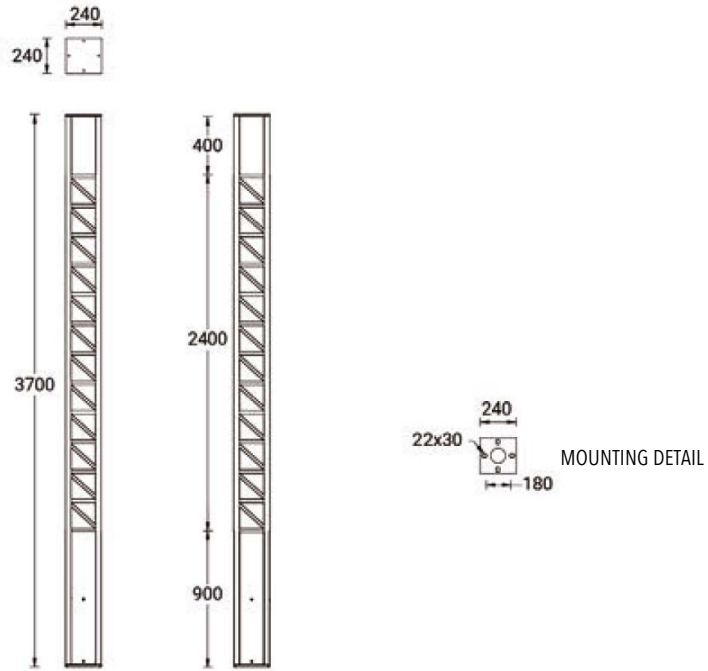

Accessories



Circuit breaker box IP44  
LIGA-A21291



Root mount kit  
LIGA-A21391