


HAMILTON 2 (HAM-20011)



Product description

2 side




Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.5 m of 3x1.0 sqmm outdoor cable for HAM-20011


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Integral control gear
- Surge protection 10kV


Light symbol

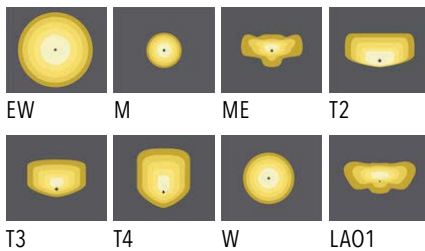

Product colour

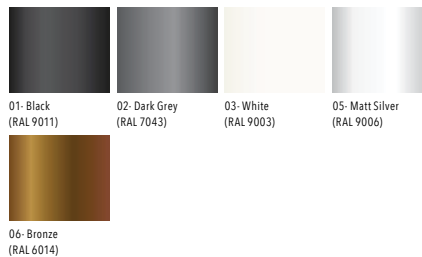

Special finishes upon request

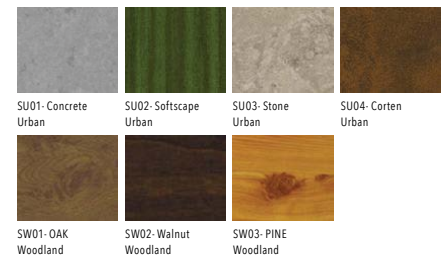

Technical information

Light source	2 x 24 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	27.52 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	54 & 106 W
Lumen	6126 - 14054 lm
Efficacy	116 - 133 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350, 700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	EW [110°], M [30°], ME [138°x60°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], W [57°], LA01 [151°x65°]
Bug	B2-U0-G0, B3-U0-G1, B1-U0-G1, B2-U0-G2, B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	99, 98, 97
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

HAMILTON 2 (HAM-20011)



Product variants

HOW TO SPECIFY

LIGA - HAM-20011 - 700 - T2 - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
HAM-20011	350 54W	EW	8030	ND	01 BLACK	
	700 106W	M	8040	DALI	02 DARK GREY	
		ME			03 WHITE	
		T2			05 MATT SILVER	
		T3			06 BRONZE	
		T4			S - SPECIAL FINISH	
		W				
		LA01				

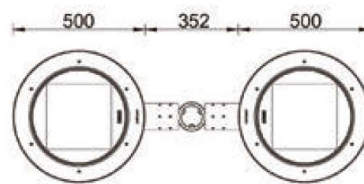

SPIGOT POST TOP

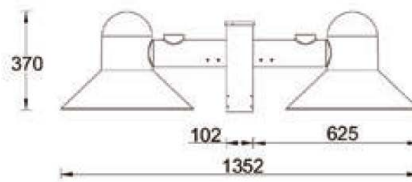

Accessories



Integrated Glare Technology
LIGA-IGT