

VANCOUVER 9 (VA-20061)



Product description

240x240 mm - 3700 mm
Decorative pattern type 2 - IP65



Luminaire structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

Light symbol



G

Product colour

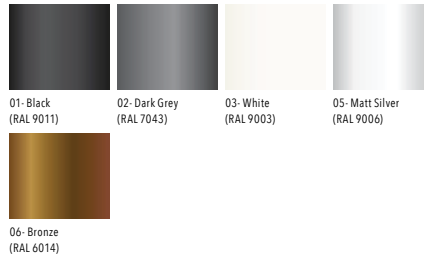

Special finishes upon request



Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	55.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	40 W
Lumen	1091 - 1167 lm
Efficacy	27 - 29 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1050 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [64°]
Bug	B1-U2-G0
ULR	2%
ULOR	2%
CIE flux code n°3	99
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	50,700
Lifetime L80B10 (hrs)	63,500
Lifetime L80B50 (hrs)	63,500

VANCOUVER 8 (VA-20061)

Product variants

HOW TO SPECIFY

LIGA	-	VA-20061	-	1050	-	G	-	8030	-	ND	-	01
		MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH
		VA-20061		1050 40W		G		8030		ND		01 BLACK
								8040		DALI		02 DARK GREY
												03 WHITE
												05 MATT SILVER
												06 BRONZE
												S - SPECIAL FINISH

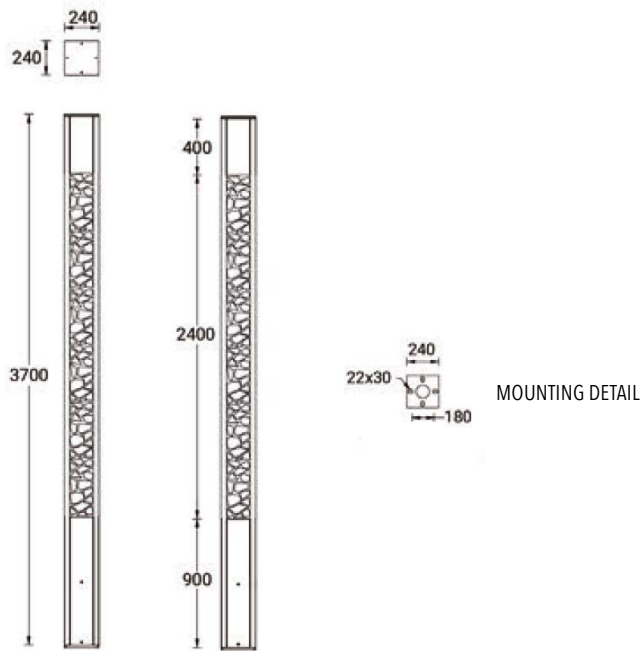

Accessories



Circuit breaker box IP44
LIGA-A21291



Root mount kit
LIGA-A21391