

**LIGHT LINEAR PT 6 (LI-21321)**



**Product description**

2 sides - Supplied with specific square, straight aluminium pole - Height options: 3,4,5,6 m




**Luminaire structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV


**Light symbol**



**Product colour**

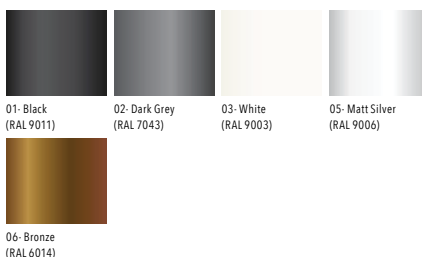

**Special finishes upon request**

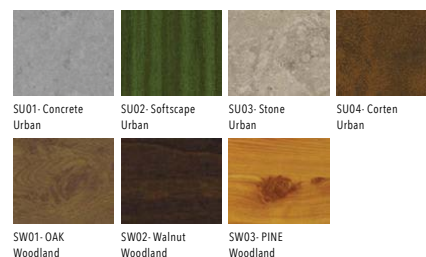

**Technical information**

Light source	8 x 12 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	40.8 kg
Operating temperature	-20°C to 50°C

<b>Luminaire</b>	
Power	310 W
Lumen	29698 - 33782 lm
Efficacy	96 - 109 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1000 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], LA01 [151°x65°]
Bug	B2-U0-G2, B3-U0-G3
ULR	0%
ULOR	0%
CIE flux code n°3	98

**LIGHT LINEAR PT 6 (LI-21321)**

**Product variants**

**HOW TO SPECIFY**

LIGA	-	LI-21321	-	1000	-	T2	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
LI-21321	1000 310W	T2	8030	ND	01 BLACK							
		T3	8040	DALI	02 DARK GREY							
		T4			03 WHITE							
		LA01			05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

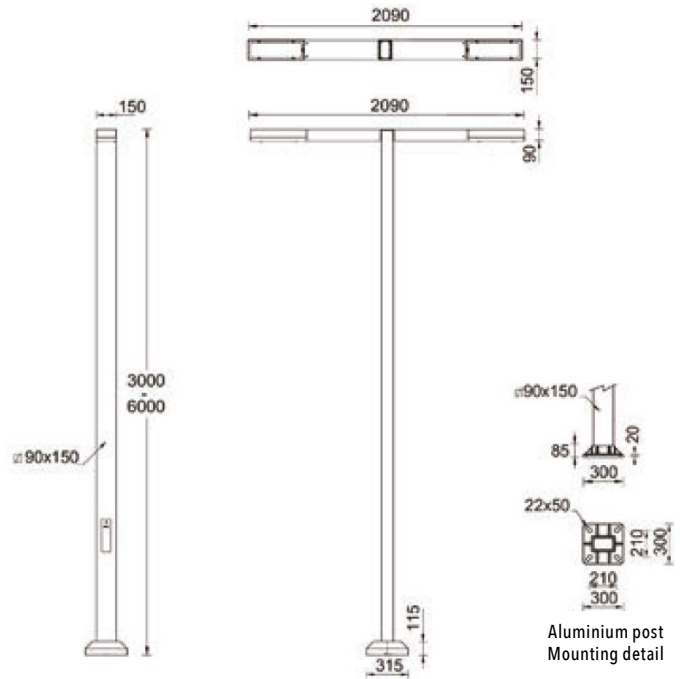

**Accessories**



3 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides  
LIGA-APC230090-PT6-LI-21321



4 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides  
LIGA-APC240090-PT6-LI-21321



5 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides  
LIGA-APC250090-PT6-LI-21321



6 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides  
LIGA-APC260090-PT6-LI-21321



Internal cable support for pole 3 m  
LIGA-A23991



Internal cable support for pole 4 m  
LIGA-A24091



Internal cable support for pole 5 m  
LIGA-A24191



Internal cable support for pole 6 m  
LIGA-A24291