

LADOR 2 (LD-50011)



Product description


Integral control gear - 82x82 mm - Class I



Luminaire structure

- Die-cast aluminium housing
- Thermal heat dissipation body
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for LD-50011
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


Light symbol

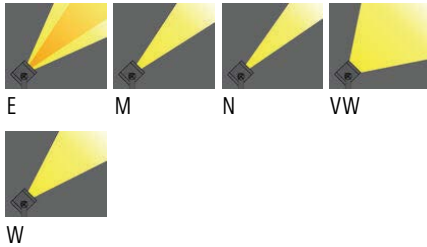

Product colour



Special finishes upon request

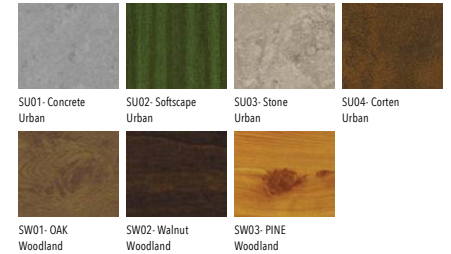

Technical information

Light source	4 LED
Light source type	LED
Dimming type	On/Off
Material	Aluminium
Weight	1.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	10 W
Lumen	906 - 1112 lm
Efficacy	91 - 111 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	E [43°x11°], M [16°] N [10°], VW [68°], W [34°]
Bug	B1-U0-G0, B2-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LADOR 2 (LD-50011)

Product variants

HOW TO SPECIFY


MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
LIGA - LD-50011	700 10W	E	8030	ND	01 BLACK
		M	8040		02 DARK GREY
		N			03 WHITE
		VW			05 MATT SILVER
		W			06 BRONZE
					S - SPECIAL FINISH



Accessories




Anti-glare visor  
LIGA-A52931




Honeycomb louvre  
LIGA-A51921




Linear spread lens  
LIGA-A51214




Colour filter (Red)  
LIGA-A51216



Colour filter (Blue)  
LIGA-A51217



Colour filter (Yellow)  
LIGA-A51218



Colour filter (Green)  
LIGA-A51219