

## Product description

With remote driver / remote IP box - Round  
Stainless Steel frame



## Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6mm thick front ring in stainless steel
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is included for NIKON 1

## Light symbol



VN

## Product colour



00 - Stainless Steel

## Technical information

Light source	1 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Stainless Steel
Weight	0.7 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	11 W
Lumen	640 - 753 lm
Efficacy	58 - 68 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	VN [8°]
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	109,000
Lifetime L80B10 (hrs)	109,000
Lifetime L80B50 (hrs)	109,000

NIKON 1 (NI-80503-S)


Product variants

HOW TO SPECIFY

LIGA	-	NI-80503-S	-	700	-	VN	-	8030	-	ND	-	00
		<b>MODEL</b>		<b>OUTPUT</b>		<b>DISTRIBUTION</b>		<b>CRI/CCT</b>		<b>DIMMING</b>		<b>COLOUR FINISH</b>
		NI-80503-S		700 11W		VN		8030		ND		00 STAINLESS STEEL
								8040		DALI		

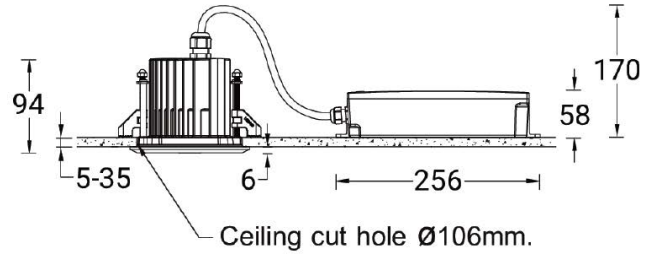

Accessories



Concrete box modification upon request  
LIGA-CONCRETE-BOX