

STEAMER 1 (SE-90002)



Product description


Rectangular - Medium




Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.5 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Surge protection 10kV


Light symbol

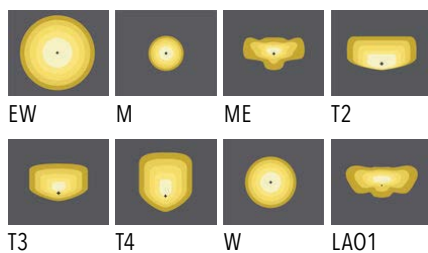

Product colour

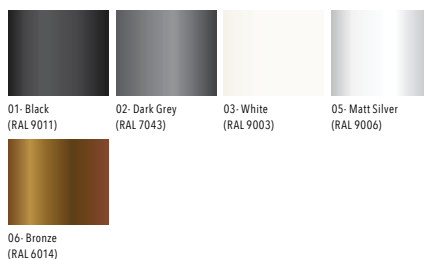

Special finishes upon request

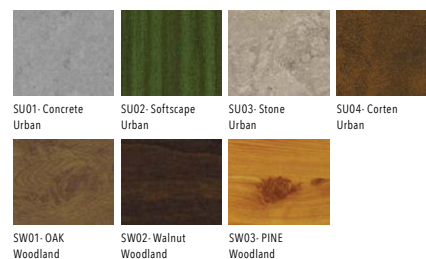

Technical information

Light source	2 x 24 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	10.1 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	26, 52, 78 & 104 W
Lumen	3108 - 14374 lm
Efficacy	120 - 138 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	175, 350, 525 & 700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	EW [105°x115°], M [30°], ME [137°x58°], T2 [136°x51°], T3 [119°x86°], T4 [102°x74°], W [57°], LAO1 [151°x65°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

STEAMER 1 (SE-90002)

Product variants

HOW TO SPECIFY

LIGA	-	SE-90002	-	700	-	T2	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
SE-90002	175 26W	EW	8030	ND	01 BLACK							
	350 52W	M	8040	DALI	02 DARK GREY							
	525 78W	ME			03 WHITE							
	700 104W	T2			05 MATT SILVER							
		T3			06 BRONZE							
		T4			S - SPECIAL FINISH							
		W										
		LA01										

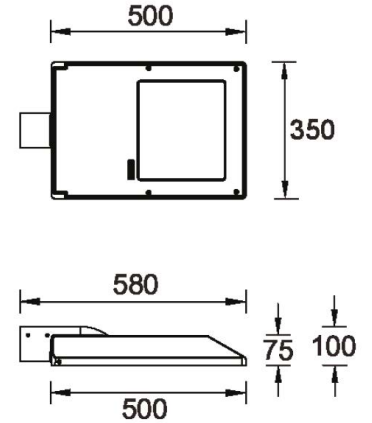

Maximum pathway spacing in metres

LUMINAIRE	AS/NZS 1158.3.1:2020	PATHWAY WIDTH			
		2.0 m		3.0 m	
		MH 4.0m	MH 5.0m	MH 4.0m	MH 5.0m
	PP1 LIGHT CAT	15.6	19.0	15.5	18.9
	PP2 LIGHT CAT	19.1	23.8	19.0	23.7
LIGA-SE-90002-175-LA01-8030	PP3 LIGHT CAT	24.3	29.5	24.3	29.4
	PP4 LIGHT CAT	27.2	33.8	27.2	33.7
	PP5 LIGHT CAT	33.7	39.5	33.6	39.5

MAINTENANCE FACTOR - 0.8. OFFSET FROM PATH EDGE - 0.5m. Spacing table to be used as a guide. Figures are based on parameters set out in AS/NZS 1158.3.1:2020 - Table 3.4.

Accessories



Double adjustable 60°
LIGA-A91760



Double arm mount
LIGA-A91160



Double arm mount
LIGA-A91360



Double arm mount
LIGA-A91560



Single adjustable 60°
LIGA-A91660



Single arm mount
LIGA-A91060



Single arm mount
LIGA-A91260



Single arm mount
LIGA-A91460



Triple arm mount - Type 1
LIGA-A92260



Triple arm mount - Type 2
LIGA-A92360