

LIGHT LINEAR PT 6 (LI-21182)



Product description

2 sides - Supplied with specific square, straight aluminium pole - Height options: 3,4,5,6 m




Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV


Light symbol



Product colour

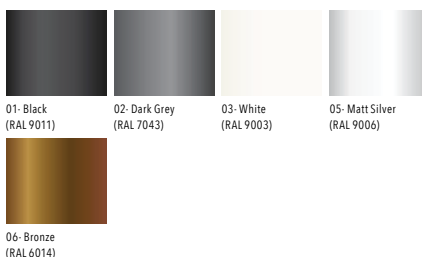

Special finishes upon request

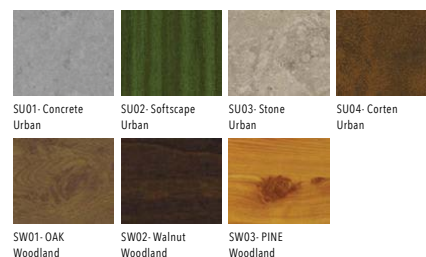

Technical information

Light source	2 x 48 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	40.8 kg
Operating temperature	-20°C to 50°C

Luminaire	
Power	210 W
Lumen	21842 - 25036 lm
Efficacy	104 - 119 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	T2 [140°x47°], T3 [134°x68°], T4 [92°x78°], LA01 [151°x65°]
Bug	B2-U0-G2
ULR	0%
ULOR	0%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

LIGHT LINEAR PT 6 (LI-21182)

Product variants

HOW TO SPECIFY

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
LI-21182	700 210W	T2	8030	ND	01 BLACK
		T3	8040	DALI	02 DARK GREY
		T4			03 WHITE
		LA01			05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

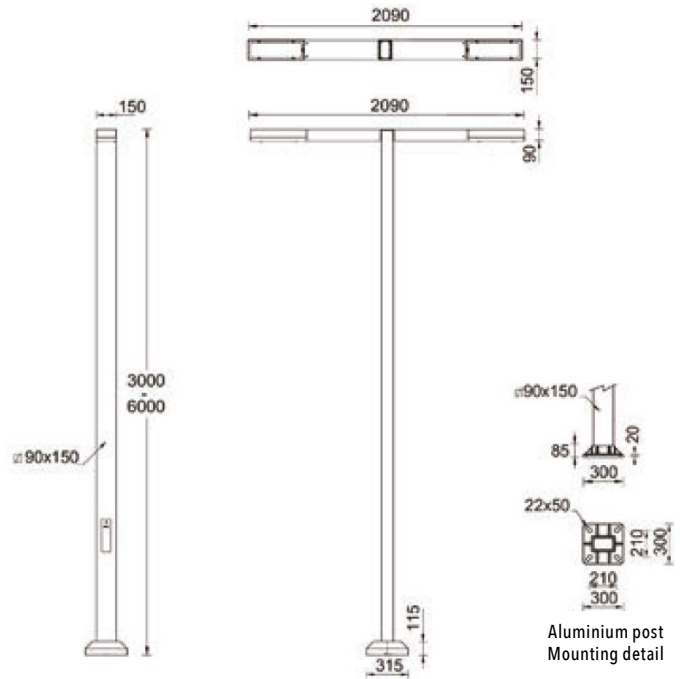

Accessories



3 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC230090-PT6-LI-21182



4 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC240090-PT6-LI-21182



5 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC250090-PT6-LI-21182



6 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
LIGA-APC260090-PT6-LI-21182



Internal cable support for pole 3 m
LIGA-A23991



Internal cable support for pole 4 m
LIGA-A24091



Internal cable support for pole 5 m
LIGA-A24191



Internal cable support for pole 6 m
LIGA-A24291