

**VANCOUVER 36 (VA-10072)**



**Product description**

240x240 mm - 1000 mm - Decorative pattern type 2



**Luminaire structure**

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Custom Decorative Panels available upon request

**Light symbol**




G

**Product colour**



**Special finishes upon request**

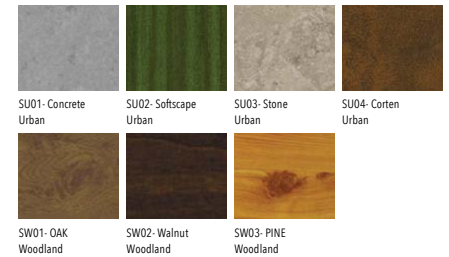

**Technical information**

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	15.8 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	21 W
Lumen	1461 - 1571 lm
Efficacy	70 - 75 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [134°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	61,000

**VANCOUVER 36 (VA-10072)**

Product variants

HOW TO SPECIFY

LIGA	-	VA-10072	-	500	-	G	-	8030	-	ND	-	01
MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH		
VA-10072		500 21W		G		8030		ND		01 BLACK		
						8040		DALI		02 DARK GREY		
										03 WHITE		
										05 MATT SILVER		
										06 BRONZE		
										S - SPECIAL FINISH		

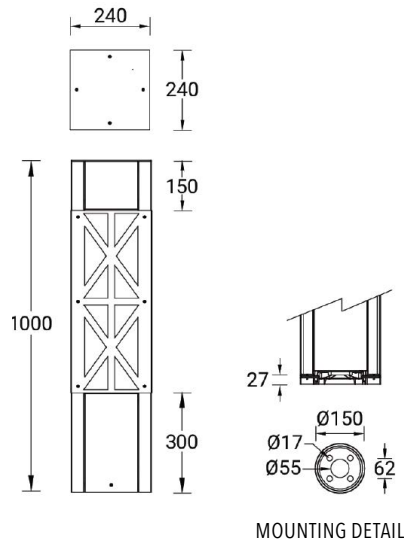

Accessories



Anchor Bolt  
LIGA - A10291