



Product description


With remote IP65 driver - Round - Aluminium frame



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector
- Remote driver (included)
- Recessed installation with remote IP65 driver

Light symbol



T2 T3 T4

Product colour



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

Special finishes upon request



SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban



SW01- OAK Woodland SW02- Walnut Woodland SW03- PINE Woodland

Technical information

Light source	16 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	3.6 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	36 W
Lumen	3295 - 3768 lm
Efficacy	92 - 105 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	T2 [140°x46°], T3 [140°x68°] T4 [91°x76°]
Bug	B1-U0-G1, B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	99, 98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

ROBUST 1 (RO-80476-A)


Product variants

HOW TO SPECIFY

LIGA	-	RO-80476-A	-	700	-	T2	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
RO-80476-A	700 36W	T2	8030	ND	01 BLACK							
		T3	8040	DALI	02 DARK GREY							
		T4			03 WHITE							
					05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

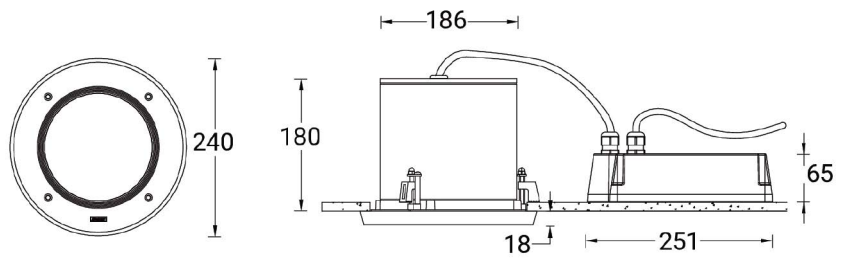

Accessories



Concrete box modification upon request
LIGA-CONCRETE-BOX