

SANDY 7 (SA-31532)



Product description

Large



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Light symbol




0

Product colour



Special finishes upon request

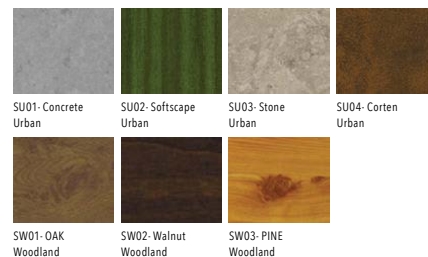

Technical information

Light source	96 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	4.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	27 W
Lumen	2170 - 2284 lm
Efficacy	80 - 85 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	0 [114°x102°]
Bug	B0-U2-G1
ULR	2%
ULOR	2%
CIE flux code n°3	92
Lifetime L90B10 (hrs)	15,000
Lifetime L80B10 (hrs)	30,000
Lifetime L80B50 (hrs)	34,000

SANDY 7 (SA-31532)

Product variants

HOW TO SPECIFY

LIGA	- SA-31532	- 700	- 8030	- ND	- 01
	MODEL	OUTPUT	CRI/CCT	DIMMING	COLOUR FINISH
	SA-31532	700 27W	8030	ND	01 BLACK
			8040	DALI	02 DARK GREY
					03 WHITE
					05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

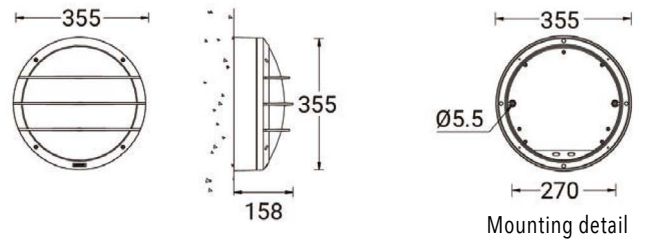

Accessories



Surface mounting box for easy cabling (SANDY 7)
LIGA-SCE-SANDY-7