

Product description


Down (Optic) & Up (Optic 2nd) - Rectangular



Luminaire structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Light symbol

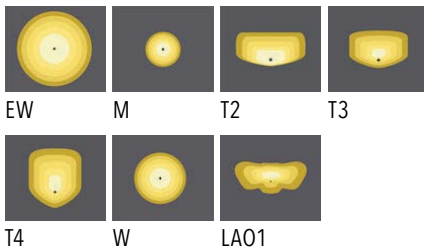

Product colour



Special finishes upon request

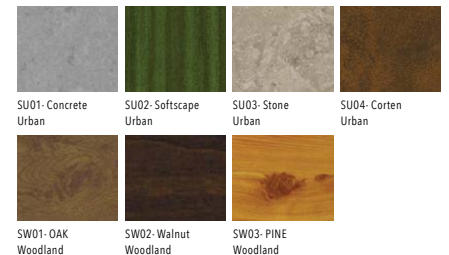

Technical information

| | |
|-----------------------|---------------|
| Light source | 12 & 12 LED |
| Light source type | LED |
| Dimming type | On/Off |
| Material | Aluminium |
| Weight | 2.0 kg |
| Operating temperature | -20°C to 40°C |

| | |
|---------------|--|
| Luminaire | |
| Power | 39 W |
| Lumen | 4090 - 4844 lm |
| Efficacy | 104 - 123 lm/W |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Drive current | 1050 mA |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | EW [109°x102°], M [30°], T2 [137°x58°], T3 [124°x86°], T4 [108°x66°], W [56°], LAO1 [151°x65°] |


| | |
|-----------------------|--|
| Optic (Up) | EW [109°x102°], M [30°], T2 [137°x58°], T3 [124°x86°], T4 [108°x66°], W [56°], LAO1 [151°x65°] |
| Bug | B1-U5-G0, B2-U5-G0, B1-U5-G1 |
| ULR | 51%, 50%, 48%, 49%, 47%, 52%, 53% |
| ULOR | 51%, 50%, 48%, 49%, 47%, 52%, 53% |
| CIE flux code n°3 | 99, 97 |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hrs) | > 90,000 |
| Lifetime L80B10 (hrs) | > 90,000 |
| Lifetime L80B50 (hrs) | > 90,000 |

LEEDS 5 (LEE-30051)

Product variants

HOW TO SPECIFY

| LIGA - LEE-30051 - 1050 - T2 - LA01 - 8030 - ND - 01 | | | | | | |
|--|----------|--------------|------|---------|---------|--------------------|
| MODEL | OUTPUT | DISTRIBUTION | | CRI/CCT | DIMMING | COLOUR FINISH |
| | | DOWN | UP | | | |
| LEE-30051 | 1050 39W | EW | EW | 8030 | ND | 01 BLACK |
| | | M | M | 8040 | | 02 DARK GREY |
| | | T2 | T2 | | | 03 WHITE |
| | | T3 | T3 | | | 05 MATT SILVER |
| | | T4 | T4 | | | 06 BRONZE |
| | | W | W | | | S - SPECIAL FINISH |
| | | LA01 | LA01 | | | |

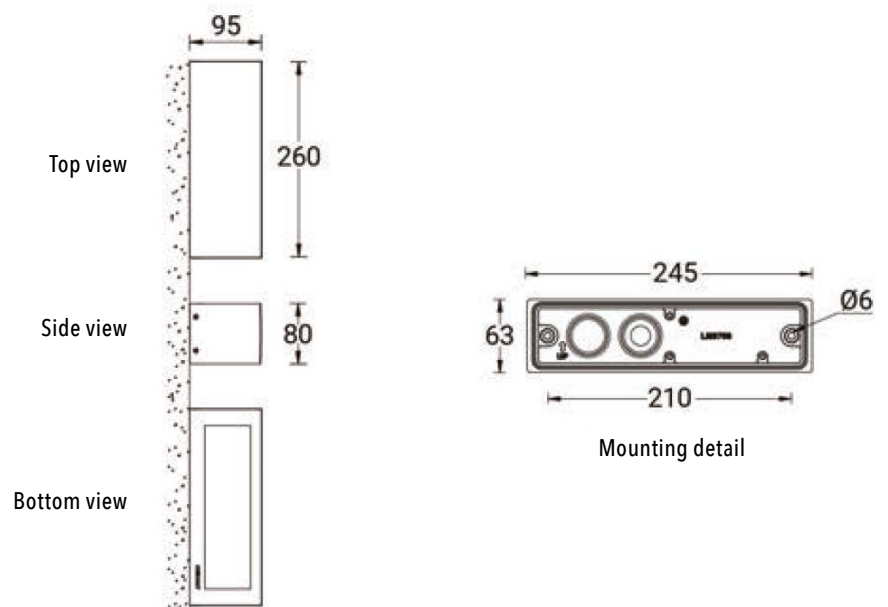

Accessories



Surface mounting box for easy cabling (LEEDS 5)
LIGA-SCE-LEEDS-5