



Product description

240x240 mm - 3700 mm
Decorative pattern type 3 - IP65



Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

Light symbol



G

Product colour



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)


Special finishes upon request



SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban



SW01- OAK Woodland



SW02- Walnut Woodland



SW03- PINE Woodland

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	54.3 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	40 W
Lumen	1560 - 1670 lm
Efficacy	39 - 42 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1050 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [56°]
Bug	B1-U2-G0
ULR	1%
ULOR	1%
CIE flux code n°3	99
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	50,700
Lifetime L80B10 (hrs)	63,500
Lifetime L80B50 (hrs)	63,500

VANCOUVER 10 (VA-20071)

Product variants

HOW TO SPECIFY

LIGA	-	VA-20071	-	1050	-	G	-	8030	-	ND	-	01
		MODEL	OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH	
		VA-20071	1050 40W		G		8030		ND		01 BLACK	
							8040		DALI		02 DARK GREY	
											03 WHITE	
											05 MATT SILVER	
											06 BRONZE	
											S - SPECIAL FINISH	

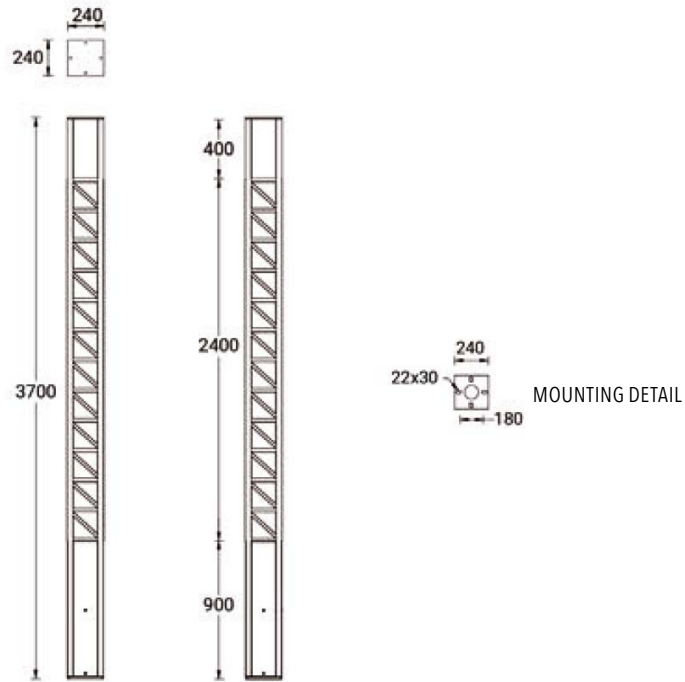

Accessories



Circuit breaker box IP44
LIGA-A21291



Root mount kit
LIGA-A21391