

QUANTUM 1 (QA-50004)



Product description

Small - RGBW



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for QA-50004
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Light symbol




E N M

Product colour



01-Black (RAL 9011) 02-Dark Grey (RAL 7043) 03-White (RAL 9003) 05-Matt Silver (RAL 9006) 06-Bronze (RAL 6014)

Special finishes upon request

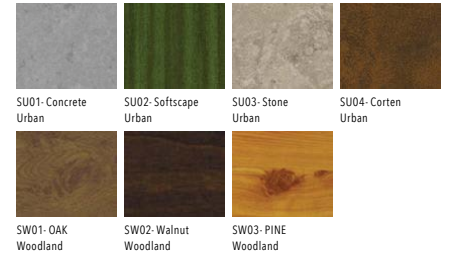

SU01-Concrete Urban SU02-Softscape Urban SU03-Stone Urban SU04-Corten Urban SW01-OAK Woodland SW02-Walnut Woodland SW03-PINE Woodland

Technical information

Light source	7 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	4.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	33 W
Lumen	1113 - 1432 lm
Efficacy	34 - 43 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	E [26°x48°], N [21°], M [35°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	109,000
Lifetime L80B10 (hrs)	109,000
Lifetime L80B50 (hrs)	109,000

QUANTUM 1 (QA-50004)

Product variants

HOW TO SPECIFY

LIGA - QA-50004 - 350 - M - RGBW30 - DMX/RDM - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
QA-50004	350 33W	E	RGBW30	DMX	01 BLACK	
		N	RGBW40	DMX/RDM	02 DARK GREY	
		M			03 WHITE	
					05 MATT SILVER	
					06 BRONZE	
					S - SPECIAL FINISH	

