

LIGHTSOFT 2 (LH-10675)



Product description

186x186 - 600 mm - Square - IK08



Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency polycarbonate lens
- Anodised, high-purity aluminium reflector
- Integral control gear

Light symbol



G


Product colour



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)

06- Bronze (RAL 6014)

Special finishes upon request

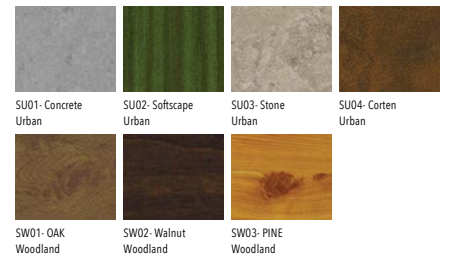

SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban

SW01- OAK Woodland SW02- Walnut Woodland SW03- PINE Woodland

Technical information

Light source	12 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	7.3 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	14 & 27 W
Lumen	580 - 1050 lm
Efficacy	38 - 39 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 & 700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [360°]
Bug	B1-U3-G1
ULR	10%
ULOR	10%
CIE flux code n°3	72
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LIGHTSOFT 2 (LH-10675)

Product variants

HOW TO SPECIFY

LIGA	-	LH-10675	-	700	-	G	-	8030	-	ND	-	01
MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH		
LH-10675		350 14W		G		8030		ND		01 BLACK		
		700 27W				8040		DALI		02 DARK GREY		
										03 WHITE		
										05 MATT SILVER		
										06 BRONZE		
										S - SPECIAL FINISH		

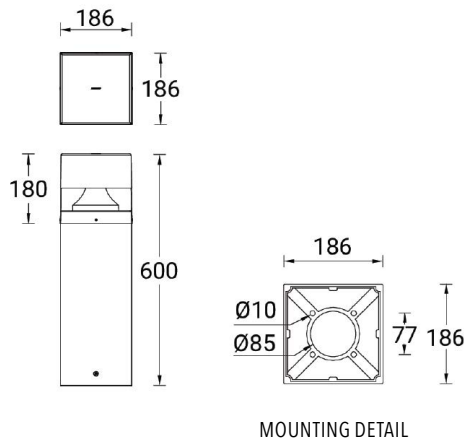

Accessories



Anchor Bolt
LIGA - A10391



Light Shield 180°
LIGA - A10731



Light Shield 90°
LIGA - A10831