



Product description


With remote IP65 driver - Round - Aluminium frame



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector
- Remote driver (included)
- Recessed installation with remote IP65 driver

Light symbol




AS

Product colour



Special finishes upon request

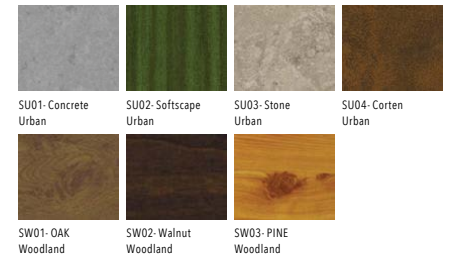

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	3.6 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	42 W
Lumen	3377 - 3418 lm
Efficacy	80 - 81 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1050 mA
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	AS [46°x56°]
Bug	B2-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	99
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	55,000

ROBUST 1 (RO-80478-A)


Product variants

HOW TO SPECIFY

LIGA	-	RO-80478-A	-	1050	-	AS	-	8030	-	ND	-	01
		MODEL		OUTPUT		DISTRIBUTION		CRI/CCT		DIMMING		COLOUR FINISH
		RO-80478-A		1050 42W		AS		8030		ND		01 BLACK
								8040		DALI		02 DARK GREY
												03 WHITE
												05 MATT SILVER
												06 BRONZE
												S - SPECIAL FINISH

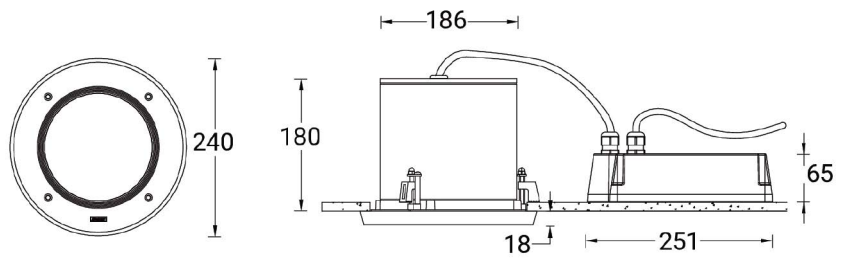

Accessories



Concrete box modification upon request
LIGA-CONCRETE-BOX