



## Product description

Large



## Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

## Light symbol



0

## Product colour



01- Black (RAL 9011)    02- Dark Grey (RAL 7043)    03- White (RAL 9003)    05- Matt Silver (RAL 9006)



06- Bronze (RAL 6014)

## Special finishes upon request



SU01- Concrete Urban    SU02- Softscape Urban    SU03- Stone Urban    SU04- Corten Urban



SW01- OAK Woodland



SW02- Walnut Woodland



SW03- PINE Woodland

## Technical information

Light source	96 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	4.1 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	27 W
Lumen	1250 - 1315 lm
Efficacy	46 - 49 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	0 [115°x119°]
Bug	B0-U1-G1
ULR	2%
ULOR	2%
CIE flux code n°3	92
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	15,000
Lifetime L80B10 (hrs)	30,000
Lifetime L80B50 (hrs)	34,000

**SANDY 9 (SA-31552)**

**Product variants**

**HOW TO SPECIFY**

LIGA	- SA-31552	- 700	- 8030	- ND	- 01
	<b>MODEL</b>	<b>OUTPUT</b>	<b>CRI/CCT</b>	<b>DIMMING</b>	<b>COLOUR FINISH</b>
	SA-31552	700 27W	8030	ND	01 BLACK
			8040	DALI	02 DARK GREY
					03 WHITE
					05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

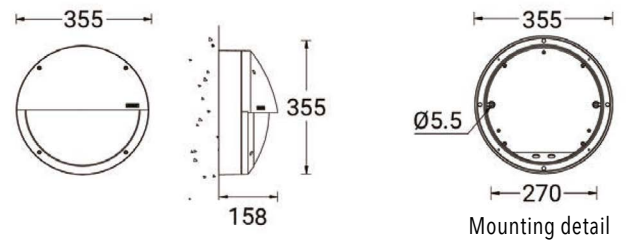

**Accessories**



Surface mounting box for easy cabling (SANDY 9)  
LIGA-SCE-SANDY-9